

FORM PTO-1390 (Modified)  
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

## TRANSMITTAL LETTER TO THE UNITED STATES

L9289.00124

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/701613

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/JP00/01911

March 28, 2000


April 2, 1999

TITLE OF INVENTION

COMMUNICATION TERMINAL APPARATUS AND BASE STATION APPARATUS

APPLICANT(S) FOR DO/EO/US

Yoshiyuki OKUBO and Izumi HORIKAWA



Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

## Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

Claim for Priority with PCT/IB/304

PCT/IB/308

PCT/RO/101

U.S. APPLICATION NO. <b>09/701613</b>	INTERNATIONAL APPLICATION NO. <b>PCT/JP00/01911</b>	ATTORNEY'S DOCKET NUMBER <b>L9289.00124</b>
---------------------------------------	--	--


21. The following fees are submitted:				<b>CALCULATIONS PTO USE ONLY</b>	
<b>BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5)) :</b>					
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1,000.00</b>					
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860.00</b>					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710.00</b>					
<input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690.00</b>					
<input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b>					
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>\$860.00</b>	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				<b>\$0.00</b>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	15 - 20 =	0	x \$18.00	<b>\$0.00</b>	
Independent claims	3 - 3 =	0	x \$80.00	<b>\$0.00</b>	
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>	<b>\$0.00</b>	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$860.00</b>	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable).				<input type="checkbox"/>	<b>\$0.00</b>
<b>SUBTOTAL =</b>				<b>\$860.00</b>	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				<b>\$0.00</b>	
<b>TOTAL NATIONAL FEE =</b>				<b>\$860.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).				<input checked="" type="checkbox"/>	<b>\$40.00</b>
<b>TOTAL FEES ENCLOSED =</b>				<b>\$900.00</b>	
				Amount to be refunded	\$
				charged	\$

☒ A check in the amount of **\$900.00** to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **19-4375** A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:	
<b>James E. Ledbetter</b> <b>Stevens, Davis, Miller &amp; Mosher, LP</b> <b>1615 L Street N.W., Suite 850</b> <b>P.O. Box 34387</b> <b>Washington, D.C. 20043-4387</b> <b>Telephone: 202/408-5100</b> <b>Facsimile: 202/408-5200</b>	 SIGNATURE <b>James E. Ledbetter</b> NAME <b>28,732</b> REGISTRATION NUMBER <b>December 1, 2000</b> DATE

17/PRTS.

1

09/701613

529 Rec'd PCT/PTC 01 DEC 2000

# DESCRIPTION

## COMMUNICATION TERMINAL APPARATUS AND BASE STATION APPARATUS

5

### Technical Field

The present invention relates to a communication terminal apparatus and a base station apparatus used in a digital mobile communication system.

10

### Background Art

Communications using digital cellular phones in Japan are currently carried out according to a PDC (Personal Digital Cellular) system, which is a unified standard in Japan. The PDC system uses a TDMA (Time Division Multiple Access) system in which a radio channel of a same frequency is assigned to every mobile station user for an allotted time. According to the TDMA system, a frequency shared by a plurality of mobile station users is divided into units called "frames" having time periodicity and a frame is further divided into several slots. A channel through which each mobile station user performs communications is determined by assigning each slot to each mobile station user.

25

However, when each frame is divided into slots, there are certain limits to shortening the slot length, hence limits to increasing the number of channels in the TDMA system. Moreover, to increase the number of

channels in the TDMA system, increasing the length of each frame and thereby increasing the number of slots included in the frame will result in increased intervals between slots assigned to a same mobile station user, making it difficult to perform high-speed data communications. Therefore, under the PDC system under which there are limits to frequency bands used, it is well imaginable that the time will come that the system will no longer be able to cope with an increased number of channels in view of the recent increase in the number of digital cellular phone subscribers.

For this reason, in order to solve the above problem, a CDMA (Code Division Multiple Access) system is recently becoming a focus of attention as a communication system for the next-generation digital mobile communication system and CDMA-based technological development is underway in an increasing manner. The CDMA system is a system implementing multiple access by applying coding processing to signals of each channel so that each channel can be distinguished.

A digital mobile communication system using a conventional CDMA system will be explained. FIG.1 illustrates a configuration of a CDMA-based digital mobile communication system. This digital mobile communication system is configured by base station 1 and mobile station 2, which can communicate with this base station. In this digital mobile communication system, communications between the base station and mobile

station are carried out with a voice channel, high-speed data channel and control channel all multiplexed on a same radio channel.

Here, in this CDMA-based digital mobile  
5 communication system, the chip rate of a spreading code used to apply coding processing to signals of each channel is constant. Because of this, in the CDMA-based digital mobile communication system, the spreading  
10 factor is changed according to the required data transfer rate, which varies between a voice communication and high-speed data communication. That is, the higher the data transfer rate, the lower the spreading factor becomes. When the spreading factor decreases as the data transfer rate increases, the bit error rate also  
15 increases, deteriorating the communication quality.

Therefore, to prevent the communication quality from deteriorating due to a reduction of the spreading factor, the conventional CDMA-based digital mobile communication system controls high bit rate  
20 communications with a high data transfer rate so that signal power is increased. This makes it possible to keep signal energy per bit constant and stabilize the communication quality.

However, the conventional CDMA-based digital  
25 mobile communication system has the following problems:

That is, such control causes a high-speed data communication with a higher data transfer rate to have greater signal power than a voice communication with a

lower data transfer rate. When a high-speed data communication has greater signal power than a voice communication, in the case where a voice channel and high-speed data channel are multiplexed on a same radio channel as shown in FIG.1, the high-speed data communication with greater power becomes an interference component against the voice communication with smaller power, resulting in deterioration of the quality of voice communication.

Moreover, multiplexing a voice channel that requires a real-time characteristic and a high-speed data channel that requires no real-time characteristic on the same radio channel is not appropriate from the standpoint of the nature of each signal.

#### Disclosure of Invention

It is an object of the present invention to provide a communication terminal apparatus and a base station apparatus capable of preventing the quality of a voice communication with a low data transfer rate from deteriorating so that a high-speed data communication signal with greater power because of a high data transfer rate does not affect a voice communication signal with smaller power because of a low data transfer rate.

The present inventor has come up with the present invention after focusing on the fact that the reason for deterioration of the quality of a voice communication with a low data transfer rate is that a communication

is carried out by multiplexing a voice channel and high-speed data channel on a same radio channel and discovering that separating the radio channel used by the voice channel from the radio channel used by the high-speed data channel can prevent the quality of the voice communication from deteriorating.

Thus, in order to attain the above object, the present invention separates the radio channel for the voice communication from the radio channel for the high-speed data communication and carries out an appropriate communication according to the type of communication channel by channel, thus preventing the voice communication from being affected by the high-speed data communication.

15

#### Brief Description of Drawings

FIG.1 is a configuration diagram showing a configuration of a conventional radio communication system;

20

FIG.2 is a configuration diagram showing a configuration of a radio communication system according to Embodiment 1 of the present invention;

25

FIG.3 is a block diagram showing a configuration of a mobile station apparatus according to Embodiment 1 of the present invention;

FIG.4 is a block diagram showing a configuration of a radio channel control section according to Embodiment 1 of the present invention;

FIG.5 is a flow chart to explain the operation of the mobile station apparatus according to Embodiment 1 of the present invention;

FIG.6 is a configuration diagram showing a  
5 configuration of a radio communication system according to Embodiment 2 of the present invention;

FIG.7 is a block diagram showing a configuration of a mobile station apparatus according to Embodiment 2 of the present invention;

10 FIG.8 is a block diagram showing a configuration of a radio channel control section according to Embodiment 2 of the present invention;

FIG.9 is a flow chart to explain the operation of the mobile station apparatus according to Embodiment 2  
15 of the present invention;

FIG.10 is a block diagram showing a configuration of a base station apparatus according to Embodiment 2 of the present invention;

FIG.11 is a configuration diagram showing a  
20 configuration of a radio communication system according to Embodiment 3 of the present invention;

FIG.12 is a block diagram showing a configuration of a mobile station apparatus according to Embodiment 3 of the present invention;

25 FIG.13 is a block diagram showing a configuration of an HDR section of the mobile station apparatus according to Embodiment 3 of the present invention;

FIG.14 is a diagram showing a frame configuration



of high-speed data received by the mobile station apparatus according to Embodiment 3 of the present invention;

FIG.15 is a flow chart to explain the operation of the mobile station apparatus according to Embodiment 3 of the present invention;

FIG.16 is a block diagram showing a configuration of a base station apparatus according to Embodiment 3 of the present invention; and

FIG.17 is a block diagram showing a configuration of an HDR section of the base station apparatus according to Embodiment 3 of the present invention.

#### Best Mode for Carrying out the Invention

With reference now to the attached drawings, embodiments of the present invention will be explained in detail below.

#### (Embodiment 1)

Embodiment 1 of the present invention will be explained using FIG.2 to FIG.5.

FIG.2 is a configuration diagram of a radio communication system according to Embodiment 1 of the present invention. This radio communication system is configured by mobile station apparatus 101, base station apparatus 102 that can communicate with this mobile station apparatus 101, voice base station apparatus 103 included in base station apparatus 102 and high-speed

data base station apparatus 104 included in base station apparatus 102.

Mobile station apparatus 101 is a mobile station apparatus capable of carrying out both voice communication and high-speed data communication. Voice base station apparatus 103 is included in base station apparatus 102 and is a base station apparatus that carries out voice communications with mobile station apparatus 101 using a radio channel for voice communication. High-speed data base station apparatus 104 is included in base station apparatus 102 and is a base station apparatus that carries out high-speed data communications with mobile station apparatus 101 using a radio channel for high-speed data communication.

The radio channel for voice communication is configured by a voice channel and a control channel based on a TDMA-based data transfer rate and communication system.

The radio channel for high-speed data communication is configured by a high-speed data channel and a control channel based on a CDMA-based data transfer rate and communication system.

When a voice signal is received, mobile station apparatus 101 receives not only a voice signal but also a control signal notifying that the communication is a voice communication, using a control channel of the radio channel for voice communication. On the other hand, when a high-speed data signal is received, mobile station

apparatus 101 receives not only a high-speed data signal but also a control signal notifying that the communication is a high-speed data communication, using a control channel of the radio channel for high-speed data communication.

Next, the configuration of mobile station apparatus 101 will be explained. FIG.3 is a block diagram showing the configuration of mobile station apparatus 101.

Voice modulation/demodulation section 201 is used when mobile station apparatus 101 carries out a voice communication, and carries out predetermined radio processing and TDMA-based modulation/demodulation processing on a voice signal transmitted/received through antenna 211. Furthermore, voice modulation/demodulation section 201 carries out demodulation processing on a control signal received using the control channel of the radio channel for voice communication.

When mobile station apparatus 101 carries out voice transmission, voice processing section 202 applies voice coding processing on an analog voice signal output from microphone 203 and converts the analog voice signal to a digital voice signal.

When mobile station apparatus 101 carries out voice reception, voice processing section 202 applies voice decoding processing on a digital voice signal and converts the digital signal to an analog voice signal.

The converted analog voice signal is output as voice from speaker 204.

High-speed data modulation/demodulation section 205 is used when mobile station apparatus 101 carries out high-speed data communication, and performs predetermined radio processing and CDMA-based modulation/demodulation processing on a high-speed data signal transmitted/received through antenna 211. Furthermore, high-speed data modulation/demodulation section 205 carries out demodulation processing on the received control signal using a control channel of the radio channel for high-speed data communication.

Data interface section 206 performs mutual conversion between a data format in high-speed data modulation/demodulation section 205 and a data format in an external apparatus so that mobile station apparatus 101 can perform data input/output via data input/output terminal 207 to/from an external apparatus, which is not shown in the figure.

Operation section 208 is configured by a push button or the like. Operation section 208 is used when mobile station apparatus carries out transmission, and outputs a call request signal to radio channel control section 209 based on the user's operations.

When the call request signal is output from operation section 208, radio channel control section 209 detects whether any external apparatus, which is not shown in the figure, is connected to input/output

terminal 207 or not. Radio channel control section 209 also decides whether the type of a communication is a voice communication or high-speed data communication from a control signal demodulated by voice

5 modulation/demodulation section 201 and high-speed data modulation/demodulation section 205. Radio channel control section 209 controls changeover switch 210 based on the detection result or the decision result.

Changeover switch 210 connects antenna 211 with  
10 both voice modulation/demodulation section 201 and high-speed data modulation/demodulation section 205 until a control signal is output from radio channel control section 209. Furthermore, changeover switch 210 connects antenna 211 with either voice  
15 modulation/demodulation section 201 or high-speed data modulation/demodulation section 205 based on a control signal from radio channel control section 209.

As shown above, equipped with radio channel control section 209, mobile station apparatus 101 performs a  
20 voice communication using a radio channel for voice communication according to a TDMA system and performs a high-speed data communication using a radio channel for high-speed data communication according to a CDMA system, that is, mobile station apparatus 101 can select  
25 a radio channel according to the type of communication.

Then, the configuration of radio channel control section 209 will be explained. FIG.4 is a block diagram showing the configuration of radio channel control

section 209. Radio channel control section 209 is configured by detection section 301, decision section 302 and changeover control section 303.

5       Detection section 301 is used when mobile station apparatus 101 carries out transmission, and detects whether any external apparatus, which is not shown in the figure, is connected to input/output terminal 207 or not and outputs a detection signal indicating the detection result to changeover control section 303.

10       That is, in the case where an external apparatus, which is not shown in the figure, is connected to input/output terminal 207, detection section 301 outputs a detection signal requesting a high-speed data communication to changeover control section 303. In the  
15       case where no external apparatus, which is not shown in the figure, is connected to input/output terminal 207, detection section 301 outputs a detection signal requesting a voice communication to changeover control section 303.

20       Decision section 302 is used when mobile station apparatus 101 performs reception, and decides whether the type of communication is a voice communication or high-speed data communication from a control signal demodulated by voice modulation/demodulation section  
25       201 and high-speed data communication and outputs a control signal indicating the decision result to changeover control section 303.

Changeover control section 303 outputs a control

signal to operate changeover switch 210 to changeover switch 210 based on the content of the detection signal or the control signal. That is, changeover control section 303 operates changeover switch 210 based on the  
5 content of the detection signal or the control signal.

More specifically, in the case where it is judged that a voice communication will be carried out, changeover control section 303 connects a line linking voice modulation/demodulation section 201 to antenna 211  
10 and disconnects a line linking high-speed data modulation/demodulation section 205 to antenna 211. On the other hand, in the case where it is judged that a high-speed data communication will be carried out, changeover control section 303 connects a line linking  
15 high-speed data modulation/demodulation section 205 to antenna 211 and disconnects a line linking voice modulation/demodulation section 201 to antenna 211.

Then, the operation of mobile station apparatus 101 having the above configuration will be explained using  
20 the flow chart in FIG.5.

In steps (hereinafter referred to as "ST") 401 to ST404, power to mobile station apparatus 101 is turned ON and it is checked whether there is any outgoing call from mobile station apparatus 101. In the case where  
25 there is an outgoing call, the process moves on to ST405, which will be described later and in the case where there is no outgoing call, it is checked whether there is any incoming call to mobile station apparatus 101. In the

case where there is an incoming call, the process moves on to ST405, which will be described later and in the case where there is no incoming call, it is checked whether power to mobile station apparatus 101 is turned  
5 OFF or not. In the case where power to mobile station apparatus 101 is turned OFF, the processing ends here and in the case where power is not turned OFF, the system moves back to ST402 and it is checked whether there is any outgoing call again.

10 In the case where the process moves from ST402 or ST403 to ST405, it is decided in ST405 whether the type of communication is a voice communication or a high-speed data communication.

In the case where mobile station apparatus 101  
15 carries out transmission, detection section 301 detects whether any external apparatus, which is not shown in the figure, is connected to input/output terminal section 207 triggered by the user of mobile station 101 operating operation section 208. Then, detection  
20 section 301 outputs a detection signal indicating the detection result to changeover control section 303.

In the case where mobile station apparatus 101 carries out reception, decision section 302 decides whether the type of communication is voice communication  
25 or high-speed data communication based on a control signal demodulated by voice modulation/demodulation section 201 or high-speed data modulation/demodulation section 205. Then, decision section 302 outputs a



control signal indicating the decision result to  
changeover control section 303.

Changeover control section 303 decides whether the  
type of communication is a voice communication or  
5 high-speed data communication based on the content of  
the detection signal or the control signal. In the case  
where the decision result shows that it is a voice  
communication, the process moves on to ST406 and in the  
case where the decision result shows that it is a  
10 high-speed data communication, the process moves on to  
ST409.

In the case where the process moves on to ST406,  
changeover control section 303 operates changeover  
switch 210 to connect a line linking voice  
15 modulation/demodulation section 201 to antenna 211 and  
disconnects a line linking high-speed data  
modulation/demodulation section 205 to antenna 211.  
This makes voice modulation/demodulation section 201  
perform TDMA-based modulation/demodulation processing  
20 on a transmitted/received voice signal. Thus, a  
TDMA-based call is established during a voice  
communication.

In ST407, a TDMA-based voice communication is  
carried out. That is, regarding the voice signal, a  
25 communication is carried out between mobile station  
apparatus 101 and voice base station apparatus 103 based  
on a TDMA-based data transfer rate and communication  
system using a radio channel for voice communication .

In ST408, it is checked whether the voice communication has been completed or not, and in the case where the voice communication has been completed, the process moves back to ST402 and in the case where the voice communication is in progress, the process moves back to ST407.

On the other hand, in the case where the process moves from ST405 to ST409, changeover control section 303 operates changeover switch 210 to connect a line linking high-speed data modulation/demodulation section 205 to antenna 211 and disconnects a line linking voice modulation/demodulation section 201 to antenna 211. This makes high-speed data modulation/demodulation section 205 perform CDMA-based modulation/demodulation processing on a transmitted/received high-speed data signal. Thus, a CDMA-based call is established during a high-speed data communication.

In ST410, a CDMA-based high-speed data communication is carried out. That is, regarding the high-speed data, a communication is carried out between mobile station apparatus 101 and high-speed data base station apparatus 104 based on a CDMA-based data transfer rate and communication system using a radio channel for high-speed data communication.

In ST411, it is checked whether the high-speed data communication has been completed or not, and in the case where the high-speed data communication has been completed, the process moves back to ST402 and in the

case where the high-speed data communication is in progress, the process moves back to ST410.

As shown above, this embodiment makes it possible to carry out a communication by selecting a radio channel to be used according to the use in such a way that a voice communication is carried out using a TDMA-based radio channel for voice communication during a voice communication and a high-speed data communication is carried out using a CDMA-based radio channel for high-speed data communication during a high-speed data communication. As a result, it is possible to prevent the voice communication from being affected by the high-speed data communication, thus preventing deterioration of the quality of the voice communication. It is also possible to perform a radio communication based on an appropriate communication system according to the type of communication.

Furthermore, this embodiment is implemented by simply adding a base station apparatus based on a CDMA system, which is a next-generation digital cellular phone communication system, to a base station apparatus installed based on a TDMA system, which is a current digital cellular phone communication system in Japan. That is, no changes need to be added to the existing base station apparatus installed based on the TDMA system. In this way, it is possible to easily implement a mobile communication system capable of preventing deterioration of the quality of voice communication.

Furthermore, since there is no need to discard the existing base station apparatus installed based on the TDMA system, it is possible to contribute to effective utilization of resources.

5

(Embodiment 2)

Embodiment 2 of the present invention will be explained suing FIG.6 to FIG.10.

FIG.6 is a configuration diagram of a radio  
10 communication system according to Embodiment 2 of the present invention. This radio communication system is configured by mobile station apparatus 501 and base station apparatus 502 that can communicate with this mobile station apparatus 501.

15 Mobile station apparatus 501 is a mobile station apparatus capable of carrying out both voice communication and high-speed data communication. Base station apparatus 502 is a base station apparatus capable of carrying out both voice communication and high-speed  
20 data communication.

A radio channel for a common control channel is a radio channel for a common control signal used for mobile station apparatus 501 and base station apparatus 502 to decide the type of communication. Moreover, the radio  
25 channel for the common control channel is configured by a common control channel, which is digital-modulated based on a TDMA system with a lower data transfer rate and narrower band than a TDMA system used for a voice

signal.

The radio channel for voice communication is a radio channel used when mobile station apparatus 501 and base station apparatus 502 carry out a voice communication.

5 Furthermore, the radio channel for voice communication is configured by a voice channel, which is digital-modulated based on a TDMA-based data transfer rate and communication system.

The radio channel for high-speed data  
10 communication is a radio channel used when mobile station apparatus 501 and base station apparatus 502 carry out a high-speed data communication. Furthermore, the radio channel for high-speed data communication is configured by a high-speed data channel, which is  
15 digital-modulated based on a CDMA-based data transfer rate and communication system.

When a voice signal is received, mobile station apparatus 501 receives a common control signal notifying that the communication is a voice communication using  
20 the radio channel for common control channel. On the other hand, when a high-speed data signal is received, mobile station apparatus 501 receives a common control signal notifying that the communication is a high-speed data communication using the radio channel for common  
25 control channel.

Next, the configuration of mobile station apparatus 501 will be explained. FIG.7 is a block diagram showing the configuration of mobile station

apparatus 501. However, components in FIG.7 with the same configuration and operation as those of the components shown in FIG.3 will be assigned the same reference numerals and their explanations will be  
5 omitted.

Voice modulation/demodulation section 601 is used when mobile station apparatus 501 carries out a voice communication, and carries out predetermined radio processing and TDMA-based modulation/demodulation  
10 processing on a voice signal transmitted/received through antenna 211.

High-speed data modulation/demodulation section 602 is used when mobile station apparatus 501 carries out a high-speed data communication, and performs  
15 predetermined radio processing and CDMA-based modulation/demodulation processing on a high-speed data signal transmitted/received through antenna 211.

Common control channel modulation/demodulation section 603 carries out predetermined radio processing  
20 and modulation/demodulation processing based on a TDMA system with a lower data transfer rate and narrower band than the TDMA system used for a voice signal on a common control signal transmitted/received through antenna 211.

25 When a call request signal is output from operation section 208, radio channel control section 604 detects whether any external apparatus, which is not shown in the figure, is connected to input/output terminal 207

or not. Radio channel control section 604 also decides whether the type of communication is a voice communication or high-speed data communication from a common control signal demodulated by common control channel modulation/demodulation section 603. Radio channel control section 604 controls changeover switch 605 based on the detection result or the decision result.

Changeover switch 605 connects antenna 211 with common control channel modulation/demodulation section 603 until a control signal is output from radio channel control section 604. Furthermore, changeover switch 605 connects antenna 211 with either voice modulation/demodulation section 601 or high-speed data modulation/demodulation section 602 based on a control signal from radio channel control section 604.

As shown above, equipped with radio channel control section 604, mobile station apparatus 501 performs a voice communication using a radio channel for voice communication according to a TDMA system and performs a high-speed data communication using a radio channel for high-speed data communication according to a CDMA system, that is, mobile station apparatus 501 can select a radio channel according to the type of communication.

Then, the configuration of radio channel control section 604 will be explained. FIG.8 is a block diagram showing the configuration of radio channel control section 604. However, components of the detection section shown in FIG.8 that have the same configuration

and operation as those in FIG.4 will be assigned the same reference numerals and their explanations will be omitted.

Radio channel control section 604 is configured by  
5 detection section 301, decision section 701 and  
changeover control section 702.

Decision section 701 is used when mobile station  
apparatus 501 carries out reception, and decides whether  
the type of communication is a voice communication or  
10 high-speed data communication based on a common control  
signal demodulated by common control channel  
modulation/demodulation section 603. Then, decision  
section 701 outputs a control signal indicating the  
decision result to changeover control section 702.

15 Changeover control section 702 outputs a control  
signal to operate changeover switch 605 based on the  
content of a detection signal from detection section 301  
or a control signal from decision section 701 to  
changeover switch 605. That is, changeover control  
20 section 702 operates changeover switch 605 based on the  
content of the detection signal or the control signal.

More specifically, in the case where it is judged  
that a voice communication will be carried out,  
changeover control section 702 connects a line linking  
25 voice modulation/demodulation section 601 to antenna 211  
and disconnects a line linking high-speed data  
modulation/demodulation section 602 to antenna 211. On  
the other hand, in the case where it is judged that a



high-speed data communication will be carried out, changeover control section 702 connects a line linking high-speed data modulation/demodulation section 602 to antenna 211 and disconnects a line linking voice modulation/demodulation section 601 to antenna 211.

Then, the operation of mobile station apparatus 501 having the configuration above will be explained using the flow chart in FIG.9. However, processing in ST801 to ST804 in FIG.9 is the same as that in ST401 to ST404 in FIG.5, and therefore the explanation thereof will be omitted.

In ST805, it is decided whether the type of communication is a voice communication or a high-speed data communication. In the case where mobile station apparatus 501 carries out transmission, detection section 301 detects whether any external apparatus, which is not shown in the figure, is connected to input/output terminal section 207 triggered by the user of mobile station 501 operating operation section 208. Then, detection section 301 outputs a detection signal indicating the detection result to changeover control section 702.

In the case where mobile station apparatus 501 carries out reception, decision section 701 decides whether the type of communication is a voice communication or high-speed data communication based on a common control signal demodulated by common control channel modulation/demodulation section 603. Then,

decision section 701 outputs a control signal indicating the decision result to changeover control section 702.

Changeover control section 702 decides whether the type of communication is a voice communication or  
5 high-speed data communication based on the content of the detection signal or the control signal. In the case where the decision result shows that it is a voice communication, the process moves on to ST806 and in the case where the decision result shows that it is a  
10 high-speed data communication, the process moves on to ST809.

In the case where the process moves on to ST806, changeover control section 702 changes changeover switch 605 from the common control channel  
15 modulation/demodulation section 603 side to the voice modulation/demodulation section 601 side and connects a line linking voice modulation/demodulation section 601 to antenna 211. This makes voice modulation/demodulation section 601 perform TDMA-based  
20 modulation/demodulation processing on a transmitted/received voice signal. Thus, a TDMA-based call is established during a voice communication.

In ST807, a TDMA-based voice communication is carried out. That is, regarding the voice signal, a  
25 communication is carried out between mobile station apparatus 501 and base station apparatus 502 based on a TDMA-based data transfer rate and communication system using a radio channel for voice communication.

In ST808, it is checked whether the voice communication has been completed or not, and in the case where the voice communication has been completed, the process moves back to ST802 and in the case where the voice communication is in progress, the process moves back to ST807.

On the other hand, in the case where the process moves from ST805 to ST809, changeover control section 702 changes the changeover switch from the common control channel modulation/demodulation section 603 side to the high-speed data modulation/demodulation section 602 side and connects a line linking high-speed data modulation/demodulation section 602 to antenna 211. This makes high-speed data modulation/demodulation section 602 perform CDMA-based modulation/demodulation processing on a transmitted/received high-speed data signal. Thus, a CDMA-based call is established during a high-speed data communication.

In ST810, a CDMA-based high-speed data communication is carried out. That is, regarding the high-speed data, a communication is carried out between mobile station apparatus 501 and base station apparatus 502 based on a CDMA-based data transfer rate and communication system using a radio channel for high-speed data communication.

In ST811, it is checked whether the high-speed data communication has been completed or not, and in the case where the high-speed data communication has been

completed, the process moves back to ST802 and in the case where the high-speed data communication is in progress, the process moves back to ST810.

Then, the configuration of base station apparatus 502 will be explained. FIG.10 is a block diagram showing the configuration of base station apparatus 502.

Voice modulation/demodulation section 901 is used when base station apparatus 502 carries out a voice communication, and carries out predetermined radio processing and TDMA-based modulation/demodulation processing on a voice signal transmitted/received through antenna 902.

When base station apparatus 502 carries out voice transmission, voice processing section 903 applies voice coding processing on an analog voice signal output from a higher-level apparatus, which is not shown in the figure, via input/output terminal 904 and converts the analog voice signal to a digital voice signal.

Furthermore, when base station apparatus 502 carries out voice reception, voice processing section 903 applies voice decoding processing on a digital voice signal and converts the digital voice signal to an analog voice signal. Voice processing section 903 outputs the converted analog voice signal to a higher-level apparatus, which is not shown in the figure, via input/output terminal 904.

High-speed data modulation/demodulation section 905 is used when base station apparatus 502 carries out

high-speed data communication, and performs predetermined radio processing and CDMA-based modulation/demodulation processing on a high-speed data signal transmitted/received through antenna 906.

5           Common control channel modulation/demodulation section 908 carries out predetermined radio processing and modulation/demodulation processing based on a TDMA system with a lower data transfer rate and narrower band than the TDMA system used for a voice signal on a common  
10 control signal transmitted/received through antenna 909.

          Decision section 910 is used when base station apparatus 502 carries out reception, and decides whether the type of communication is voice communication or  
15 high-speed data communication based on a common control signal demodulated by common control channel modulation/demodulation section 908 and outputs a control signal indicating the decision result to  
changeover control section 911.

20           Control section 911 outputs an operation instruction signal/operation stop instruction signal to voice modulation/demodulation section 901 and high-speed data modulation/demodulation section 905 based on the content of a control signal from decision section  
25 910.

          Then, the operation of base station apparatus 502 will be explained using FIG.10. First, the case where base station apparatus 502 carries out reception will

be explained.

When a voice signal is received, base station apparatus 502 receives a common control signal notifying that the communication is a voice communication using the radio channel for common control channel. On the other hand, when a high-speed data signal is received, base station apparatus 502 receives a common control signal notifying that the communication is a high-speed data communication using the radio channel for common control channel.

In base station apparatus 502, common control channel modulation/demodulation section 908 performs demodulation processing on the common control signal received through antenna 909 . Then, decision section 910 decides whether the type of communication is voice communication or high-speed data communication based on the demodulated common control signal. Then, decision section 910 outputs a control signal indicating the decision result to control section 911.

Control section 911 outputs an operation instruction signal/operation stop instruction signal to voice modulation/demodulation section 901 and high-speed data modulation/demodulation section 905 based on the content of a control signal from decision section 910.

That is, in the case where the type of the communication is voice communication, control section 911 outputs an operation instruction signal to voice

modulation/demodulation section 901 and an operation stop instruction signal to high-speed data modulation/demodulation section 905. On the other hand, in the case where the type of the communication is high-speed data communication, control section 911 outputs an operation instruction signal to high-speed data modulation/demodulation section 905 and an operation stop instruction signal to voice modulation/demodulation section 901.

10           Through the above operations, in the case of a voice communication, the voice signal received through antenna 902 is subjected to demodulation processing by voice modulation/demodulation section 901 and converted to an analog voice signal by voice processing section 903.

15   Then, the converted analog voice signal is output to a higher-level apparatus, which is not shown in the figure, via input/output terminal 904.

On the other hand, in the case of a high-speed data communication, the high-speed data signal received through antenna 906 is subjected to demodulation processing by high-speed data modulation/demodulation section 905. Then, the demodulated high-speed data signal is output to a higher-level apparatus, which is not shown in the figure, via input/output terminal 907.

25           Then, the case where base station apparatus 502 carries out transmission will be explained. First, control section 911 outputs a common control signal to distinguish whether a signal to be transmitted is a voice

signal or high-speed data signal to common control  
 channel modulation/demodulation section 908. The  
 common control signal is modulated by common control  
 channel modulation/demodulation section 908, then  
 5 transmitted through antenna 909.

Furthermore, control section 911 outputs a common  
 control signal to common control channel  
 modulation/demodulation section 908 and at the same time  
 outputs an operation instruction signal/operation stop  
 10 instruction signal to voice modulation/demodulation  
 section 901 and high-speed data modulation/demodulation  
 section 905.

That is, in the case where the type of the  
 communication is voice communication, control section  
 15 911 outputs an operation instruction signal to voice  
 modulation/demodulation section 901 and an operation  
 stop instruction signal to high-speed data  
 modulation/demodulation section 905. On the other hand,  
 in the case where the type of the communication is  
 20 high-speed data communication, control section 911  
 outputs an operation instruction signal to high-speed  
 data modulation/demodulation section 905 and an  
 operation stop instruction signal to voice  
 modulation/demodulation section 901.

25 Through the above operations, in the case of a voice  
 communication, the voice signal output from a  
 higher-level apparatus, which is not shown in the figure,  
 via input/output terminal 904 is converted to a digital



voice signal by voice processing section 903. Then, the converted digital voice signal is subjected to modulation processing by voice modulation/demodulation section 901 and transmitted through antenna 902.

5           On the other hand, in the case of a high-speed data communication, the high-speed data signal output from a higher-level apparatus, which is not shown in the figure, via input/output terminal 907 is subjected to modulation processing by high-speed data  
10 modulation/demodulation section 905. The modulated high-speed data signal is transmitted through antenna 906.

As shown above, this embodiment makes it possible to carry out a communication by selecting a radio channel  
15 to be used according to the use in such a way that a voice communication is carried out using a TDMA-based radio channel for voice communication during a voice communication and a high-speed data communication is carried out using a CDMA-based radio channel for  
20 high-speed data communication during a high-speed data communication. As a result, it is possible to prevent the voice communication from being affected by the high-speed data communication, thus preventing deterioration of the quality of the voice communication.  
25 It is also possible to perform a radio communication based on an appropriate communication system according to the type of communication.

Furthermore, according to this embodiment, the

control channel used by a control signal that controls connections to a radio channel for voice communication and a radio channel for high-speed data communication is separated as an independent common control channel  
5 to be used commonly for both radio channels, making it possible to improve the efficiency of frequency utilization in a radio communication system.

On the other hand, it is also possible to use a common control signal digital-modulated based on a TDMA  
10 system used for a voice signal. This allows the common control channel and voice channel to use a same frequency band, making it possible to further improve the efficiency of frequency utilization in a radio communication system. Furthermore, since it is  
15 possible to perform modulation/demodulation processing for a common control signal based on a TDMA system used for a voice signal, the common control channel modulation/demodulation section and the voice modulation/demodulation section can be unified into one  
20 modulation/demodulation section, which simplifies the apparatus configuration of the mobile station apparatus and base station apparatus.

Moreover, it is also possible to use a common control signal digital-modulated based on a CDMA system.  
25 This allows the common control channel and high-speed data channel to use a same frequency band, making it possible to further improve the efficiency of frequency utilization in a radio communication system.

Furthermore, since it is possible to perform modulation/demodulation processing for a common control signal based on a CDMA system, the common control channel modulation/demodulation section and the high-speed data modulation/demodulation section can be unified into one modulation/demodulation section, which simplifies the apparatus configuration of the mobile station apparatus and base station apparatus.

10 (Embodiment 3)

Embodiment 3 of the present invention will be explained using FIG.11 to FIG.17.

FIG.11 is a configuration diagram of a radio communication system according to Embodiment 3 of the present invention. This radio communication system is configured by mobile station apparatus 1001 and base station apparatus 1002 that can communicate with this mobile station apparatus 1001.

Mobile station apparatus 1001 is a mobile station apparatus capable of carrying out both voice communication and high-speed data communication. Base station apparatus 1002 is a base station apparatus capable of carrying out both voice communication and high-speed data communication.

25 A radio channel for common control channel is a radio channel for a common control signal used for mobile station apparatus 1001 and base station apparatus 1002 to decide the type of communication.

The radio channel for voice communication is a radio channel used when mobile station apparatus 1001 and base station apparatus 1002 carry out a voice communication. Furthermore, this radio channel for voice communication is configured by a voice channel digital-modulated based on a CDMA system.

The radio channel for high-speed data communication is a radio channel used when mobile station apparatus 1001 and base station apparatus 1002 carry out a high-speed data communication. Furthermore, this radio channel for high-speed data communication is configured by a high-speed data channel digital-modulated based on an HDR (High Data Rate) system.

Here, the HDR system is used for high-speed data communication and is a communication system that improves the transfer efficiency of downlink from a base station apparatus to a mobile station apparatus. In the HDR system, a communication channel (here, a high-speed data channel) is time-divided and assigned to each mobile station apparatus and the transfer rate of the assigned slot is set according to the communication quality.

When a voice signal is received, mobile station apparatus 1001 receives a common control signal notifying that the communication is a voice communication using a radio channel for a common control channel. On the other hand, when a high-speed data signal is received, mobile station apparatus 1001 receives a common control signal notifying that the

communication is a high-speed data communication using a radio channel for a common control channel.

Next, the configuration of mobile station apparatus 1001 will be explained. FIG.12 is a block diagram showing the configuration of mobile station apparatus 1001. However, components with the same configuration and operation as those of the components shown in FIG.7 will be assigned the same reference numerals and their explanations will be omitted.

CDMA section 1101 is used when mobile station apparatus 1001 carries out a voice communication. CDMA section 1101 carries out CDMA-based predetermined radio processing and predetermined modulation/demodulation processing on a voice signal transmitted/received through antenna 211.

HDR section 1102 is used when mobile station apparatus 1001 carries out a high-speed data communication. HDR section 1102 performs HDR-based predetermined radio processing and predetermined modulation/demodulation processing on a high-speed data signal transmitted/received through antenna 211. The detailed configuration of HDR section 1102 will be described later.

Common control channel modulation/demodulation section 1103 carries out predetermined radio processing and modulation/demodulation processing on a common control signal transmitted/received through antenna 211.

As shown above, mobile station apparatus 1001 performs a voice communication using a radio channel for voice communication according to a CDMA system and performs a high-speed data communication using a radio channel for high-speed data communication according to an HDR system, that is, mobile station apparatus 1001 can select a radio channel according to the type of communication.

Then, the configuration of HDR section 1102 will be explained. FIG.13 is a block diagram showing the configuration of HDR section 1102.

In HDR section 1102, reception RF section 1201 carries out predetermined radio processing on a received signal and outputs the received signal to despreading section 1202. Despreading section 1202 despreads the received signal. Then, despreading section 1202 outputs a known signal, which is inserted at predetermined intervals into the received signal, to communication quality measuring section 1203 and outputs the part other than the known signal of the received signal to selection section 1211.

Communication quality measuring section 1203 measures a value indicating the communication quality (e.g., signal-to-interference ratio, etc.) based on the known signal and outputs the value to transfer rate calculation section 1204. Transfer rate calculation section 1204 calculates a transfer rate value with which it is possible to communicate with base station apparatus

1002 based on the value indicating the communication quality and outputs the value to request signal generation section 1205. Request signal generation section 1205 generates a signal (data rate request signal; hereinafter referred to as "DRR") to notify base station apparatus 1002 of the transfer rate value and outputs the signal to modulation section 1206.

Modulation section 1206 performs predetermined modulation processing on the DRR output from request signal generation section 1205 and transmitted data output from interface section 206 and outputs the modulated signal to spreading section 1207. Spreading section 1207 spreads the signal output from modulation section 1206 and outputs the spread signal to transmission RF section 1208. Transmission RF section 1208 performs predetermined radio processing on the spread signal.

Demodulation section 1209 performs predetermined demodulation processing on a control signal inserted at the beginning of each frame of the received signal and a slot selected by selection section 1211. Reception control section 1210 notifies selection section 1211 of a slot including a signal addressed to the own station based on the control signal inserted at the beginning of each frame of the received signal. Selection section 1211 selects the corresponding slot from the received signal according to the notification from reception control section 1210 and outputs the slot to demodulation

section 1209.

More specifically, demodulation section 1209, reception control section 1210 and selection section 1211 operate as follows. FIG.14 illustrates a frame configuration of high-speed data received by mobile station apparatus 1001. As shown in FIG.14, a control signal indicating the timing at which each slot is transferred and the length of each slot is inserted at the beginning of a frame.

First, demodulation section 1209 demodulates a control signal inserted at the beginning of the frame and outputs the control signal to reception control section 1210. Reception control section 1210 notifies selection section 1211 of the timing at which a slot including a signal addressed to the own station is transferred and the length of the slot according to the content of the control signal. Now, suppose, for example, the user of mobile station apparatus 1001 is user 2. The signal addressed to the own station is included in slot 2. Thus, reception control section 1210 notifies selection section 1211 of the timing at which slot 2 is transferred and the length of slot 2.

Selection section 1211 selects slot 2 from among slots input after the control signal according to the notification from reception control section 1210 and outputs slot 2 to demodulation section 1209. Then, demodulation section 1209 demodulates the signal addressed to the own station included in slot 2. This



allows mobile station apparatus 1001 to obtain high-speed data addressed to the own station.

Then, the operation of mobile station apparatus 1001 with the configuration above will be explained using the flow chart in FIG.15. However, in FIG.15, the processing in ST1401 to ST1405 is the same as that in ST801 to ST805 in FIG.9 and its explanation will be omitted.

In ST1406, changeover control section 702 in radio channel control section 604 changes changeover switch 605 from the common control channel modulation/demodulation section 1103 side to the CDMA section 1101 side and connects a line linking CDMA section 1101 to antenna 211. This makes CDMA section 1101 perform modulation/demodulation processing, etc. on a transmitted/received voice signal according to a CDMA system. Thus, a CDMA-based call is established during a voice communication.

In ST1407, a CDMA-based voice communication is carried out. That is, regarding the voice signal, a communication is carried out between mobile station apparatus 1001 and base station apparatus 1002 based on a CDMA system using a radio channel for voice communication.

In ST1408, it is checked whether the voice communication has been completed or not, and in the case where the voice communication has been completed, the process moves back to ST1402 and in the case where the

voice communication is in progress, the process moves back to ST1407.

On the other hand, in ST1409, changeover control section 702 in radio channel control section 604 changes  
 5 changeover switch 605 from the common control channel modulation/demodulation section 1103 side to the HDR section 1102 to connect a line linking HDR section 1102 to antenna 211. This makes HDR section 1102 perform  
 10 HDR-based modulation/demodulation processing on a transmitted/received high-speed data signal. Thus, an HDR-based call is established during a high-speed data communication.

In ST1410, an HDR-based high-speed data communication is carried out. That is, regarding the  
 15 high-speed data, a communication is carried out between mobile station apparatus 1001 and base station apparatus 1002 based on an HDR system using a radio channel for high-speed data communication.

In ST1411, it is checked whether the high-speed data  
 20 communication has been completed or not, and in the case where the high-speed data communication has been completed, the process moves back to ST1402 and in the case where the high-speed data communication is in progress, the process moves back to ST1410.

25 Then, the operation of base station apparatus 1002 will be explained. FIG.16 is a block diagram showing the configuration of base station apparatus 1002. However, the components shown in FIG.16 that have the same

configuration and operation as those of the components in FIG.10 are assigned the same reference numerals and their explanation will be omitted.

CDMA section 1501 is used when base station apparatus 1002 carries out a voice communication. CDMA section 1501 performs CDMA-based predetermined radio processing and predetermined modulation/demodulation processing on a voice signal transmitted/received through antenna 902.

HDR section 1502 is used when base station apparatus 1002 carries out a high-speed data communication. HDR section 1502 performs HDR-based predetermined radio processing and predetermined modulation/demodulation processing, etc. on a high-speed data signal transmitted/received through antenna 906.

Common control channel modulation/demodulation section 1503 carries out predetermined radio processing and predetermined modulation/demodulation processing on a common control signal transmitted/received through antenna 909.

Then, the configuration of HDR section 1502 will be explained. FIG.17 is a block diagram showing the configuration of HDR section 1502.

In HDR section 1502, reception RF section 1601 carries out predetermined radio processing on a received signal and outputs the received signal to despreading section 1602. Despreading section 1602 despreads the received signal and outputs the despread signal to

demodulation section 1603. Demodulation section 1603 performs predetermined demodulation processing on the received signal. Then, demodulation section 1603 outputs the DRR notified from each mobile station apparatus to assignment section 1604 and outputs signals other than the DRR to input/output terminal 907. Assignment section 1604 decides assignment of communication resources to each mobile station apparatus based on the DRR notified from each mobile station apparatus.

Then, assignment section 1604 instructs buffer 1605 to output transmitted data according to the determined assignment of the communication resources. Moreover, assignment section 1604 notifies frame creation section 1606 of the determined assignment of the communication resources. Assignment section 1604 also instructs spreading section 1608 about a spreading code to spread the transmitted data.

Buffer 1605 temporarily stores the transmitted data output via input/output terminal 907 and outputs the transmitted data to frame creation section 1606 according to the instruction from assignment section 1604.

Frame creation section 1606 converts the transmitted data addressed to mobile station apparatuses to their respective slots according to the assignment of the communication resources notified from assignment section 1604, and then creates a frame combining those

slots. Furthermore, frame creation section 1606 adds a control signal indicating the timing at which each slot is transferred and the length of each slot at the beginning of each frame. In this way, a frame with a configuration shown in FIG.14 is created. Frame creation section 1606 inserts a known signal into the transmitted data at predetermined intervals. Then, frame creation section 1606 outputs the created frame to modulation section 1607.

Modulation section 1607 performs predetermined modulation processing on the transmitted data and outputs the modulated signal to spreading section 1608. Spreading section 1608 spreads the signal output from modulation section 1607 using a spreading code instructed by assignment section 1604. Transmission RF section 1609 performs predetermined radio processing on the spread signal.

Then, the operation of base station apparatus 1002 will be explained using FIG.16. First, the case where base station apparatus 1002 carries out reception will be explained.

When a voice signal is received, base station apparatus 1002 receives a common control signal notifying that the communication is a voice communication using the radio channel for the common control channel. Furthermore, when a high-speed data signal is received, base station apparatus 1002 receives a common control signal notifying that the communication

is a high-speed data communication using a radio channel for a common control channel.

In base station apparatus 1002, common control channel modulation/demodulation section 1503 performs  
 5 demodulation processing on the common control signal received through antenna 909. Decision section 910 decides whether the type of communication is a voice communication or high-speed data communication based on the demodulated common control signal. Then, decision  
 10 section 910 outputs a control signal indicating the decision result to control section 911.

Control section 911 outputs an operation instruction signal/operation stop instruction signal to CDMA section 1501 and HDR section 1502 based on the  
 15 content of the control signal from decision section 910.

That is, when the type of the communication is a voice communication, control section 911 outputs an operation instruction signal to CDMA section 1501 and an operation stop instruction signal to HDR section 1502.  
 20 On the other hand, when the type of the communication is a high-speed data communication, control section 911 outputs an operation instruction signal to HDR section 1502 and an operation stop instruction signal to CDMA section 1501.

25 Through the above operations, in the case of a voice communication, the voice signal received through antenna 902 is subjected to demodulation processing by CDMA section 1501. On the other hand, in the case of a

high-speed data communication, the high-speed data signal received through antenna 906 is subjected to demodulation processing by HDR section 1502.

Then, the case where base station apparatus 1002 carries out transmission will be explained. First, control section 911 outputs a common control signal to distinguish whether a signal to be transmitted is a voice signal or high-speed data signal to common control channel modulation/demodulation section 1503. The common control signal is modulated by common control channel modulation/demodulation section 1503, and then transmitted through antenna 909.

Furthermore, control section 911 outputs a common control signal to common control channel modulation/demodulation section 1503 and at the same time outputs an operation instruction signal/operation stop instruction signal to CDMA section 1501 and HDR section 1502.

That is, in the case where the type of the communication is a voice communication, control section 911 outputs an operation instruction signal to CDMA section 1501 and an operation stop instruction signal to HDR section 1502. On the other hand, in the case where the type of the communication is a high-speed data communication, control section 911 outputs an operation instruction signal to HDR section 1502 and an operation stop instruction signal to CDMA section 1501.

Through the above operations, in the case of a voice

communication, the voice signal output from voice processing section 903 is subjected to modulation processing by CDMA section 1501. On the other hand, in the case of a high-speed data communication, the high-speed data signal output via input/output terminal 907 is subjected to modulation processing by HDR section 1502.

As shown above, this embodiment makes it possible to carry out a communication by selecting a radio channel to be used according to the use in such a way that a voice communication is carried out using a CDMA-based radio channel for voice communication during a voice communication and a high-speed data communication is carried out using an HDR-based radio channel for high-speed data communication during a high-speed data communication. Therefore, according to this embodiment, it is possible to perform a radio communication based on an appropriate communication system according to the type of communication.

Embodiments 1 to 3 adopt a configuration to decide whether a voice communication is performed or a high-speed data communication is performed based on whether an external apparatus is connected to the input/output terminal or not during data transmission by the mobile station apparatus. However, the decision method is not limited to this. For example, it is also possible to adopt such a configuration that the user of the mobile station apparatus switches between voice



communication and high-speed data communication through switch operations.

Furthermore, Embodiments 2 and 3 adopt a configuration of a base station apparatus with 3 antennas provided for each channel. However, the number of antennas is not limited to this. For example, the base station apparatus can also be configured to have one antenna and receive all channel signals through that one antenna. Furthermore, it is also possible to make three antennas to form an array antenna allowing the base station apparatus to form directivity and transmit/receive signals of each channel to/from each mobile station apparatus.

Furthermore, Embodiments 1 to 3 describe a mobile station apparatus as an example of communication terminal apparatus. However, Embodiments 1 to 3 are not only applicable to a mobile station apparatus, but also applicable to a non-mobile communication terminal apparatus such as a personal computer.

As described above, the present invention can prevent a high-speed data communication signal with large power because of a high data transfer rate from affecting a voice communication signal with small power because of a low data transfer rate, thus preventing deterioration of the quality of voice communication at a low data transfer rate.

This application is based on the Japanese Patent

Application No.HEI 11-096963 filed on April 2, 1999 and the Japanese Patent Application No.2000-072819 filed on March 15, 2000, entire content of which is expressly incorporated by reference herein.

5

#### Industrial Applicability

The present invention is applicable to a mobile station apparatus used in a mobile communication system and a base station apparatus that carries out a radio  
10 communication with this mobile station apparatus.

What is claimed is:

1. A communication terminal apparatus comprising:

a first modulator/demodulator that applies modulation/demodulation processing on a voice

5 communication signal;

a second modulator/demodulator that applies modulation/demodulation processing on a high-speed data communication signal;

a communication type determinator that determines  
10 a type of communication based on input information; and

a changeover controller that selects which of the first modulator/demodulator or the second modulator/demodulator is used to communicate based on a determined type of communication.

15

2. The communication terminal apparatus according to claim 1, wherein the first modulator/demodulator applies modulation/demodulation processing on a voice communication signal transmitted/received based on a  
20 TDMA system and the second modulator/demodulator applies modulation/demodulation processing on a high-speed data communication signal transmitted/received based on a CDMA system.

25 3. The communication terminal apparatus according to claim 1, wherein the first modulator/demodulator applies modulation/demodulation processing on a voice communication signal transmitted/received based on a

CDMA system and the second modulator/demodulator applies modulation/demodulation processing on a high-speed data communication signal transmitted/received based on an HDR system.

5

4. The communication terminal apparatus according to claim 1, wherein the communication type determinator determines the type of communication based on how the terminal is connected.

10

5. The communication terminal apparatus according to claim 4, wherein in the case where an external apparatus is connected to the terminal, the communication type determinator determines that the communication is a  
15 high-speed data communication.

20

6. The communication terminal apparatus according to claim 1, wherein the communication type determinator determines the type of communication based on  
information of a control signal demodulated by the first  
modulator/demodulator or the second  
modulator/demodulator.

25

7. The communication terminal apparatus according to claim 1, further comprising a third  
modulator/demodulator that applies  
modulation/demodulation processing to a control signal.

8. The communication terminal apparatus according to claim 7, wherein the communication type determinator determines the type of communication based on information of a control signal demodulated by the third  
5 modulator/demodulator.

9. A base station apparatus comprising:  
a first modulator/demodulator that applies modulation/demodulation processing on a voice  
10 communication signal;  
a second modulator/demodulator that applies modulation/demodulation processing on a high-speed data communication signal;  
a third modulator/demodulator that applies  
15 modulation/demodulation processing on a control signal;  
a communication type determinator that determines a type of communication based on input information; and  
a changeover controller that selects which of the first modulator/demodulator or the second  
20 modulator/demodulator is used to communicate based on a determined type of communication.

10. The base station apparatus according to claim 9, wherein the first modulator/demodulator applies  
25 modulation/demodulation processing on a voice communication signal transmitted/received based on a TDMA system and the second modulator/demodulator applies modulation/demodulation processing on a high-speed data

communication signal transmitted/received based on a CDMA system.

11. The base station apparatus according to claim 9,  
5 wherein the first modulator/demodulator applies modulation/demodulation processing on a voice communication signal transmitted/received based on a CDMA system and the second modulator/demodulator applies modulation/demodulation processing on a high-speed data  
10 communication signal transmitted/received based on an HDR system.

12. The base station apparatus according to claim 9,  
wherein the communication type determinator determines  
15 the type of communication based on information of a control signal demodulated by the third modulator/demodulator.

13. A radio communication method comprising:  
20 a first modulation/demodulation step of applying modulation/demodulation processing on a voice communication signal;

a second modulation/demodulation step of applying modulation/demodulation processing on a high-speed data  
25 communication signal;

a communication type determination step of determining a type of a communication based on input information; and

a changeover controlling step of selecting which of the first modulation/demodulation step or the second modulation/demodulation step is used to communicate based on a determined type of communication.

5

14. The radio communication method according to claim 13, wherein in the first modulation/demodulation step, modulation/demodulation processing is applied on a voice communication signal transmitted/received based on a TDMA system and in the second modulation/demodulation step, modulation/demodulation processing is applied on a high-speed data communication signal transmitted/received based on a CDMA system.

15. The radio communication method according to claim 13, wherein in the first modulation/demodulation step, modulation/demodulation processing is applied on a voice communication signal transmitted/received based on a CDMA system and in the second modulation/demodulation step, modulation/demodulation processing is applied on a high-speed data communication signal transmitted/received based on an HDR system.

## ABSTRACT

In a mobile station apparatus, the radio channel control section decides the type of communication based on the content of a control signal demodulated by the voice modulation/demodulation section and high-speed data modulation/demodulation section or how an external apparatus, which is not shown, is connected to the input/output terminal. Then, the radio channel control section controls the changeover switch so that the voice modulation/demodulation section performs modulation/demodulation processing when a voice communication is carried out and the high-speed data modulation/demodulation section performs modulation/demodulation processing when high-speed data communication is carried out. This control allows the mobile station apparatus to carry out communication using a radio channel for voice communication when a voice communication is carried out and using a radio channel for high-speed data communication when a high-speed data communication is carried out.



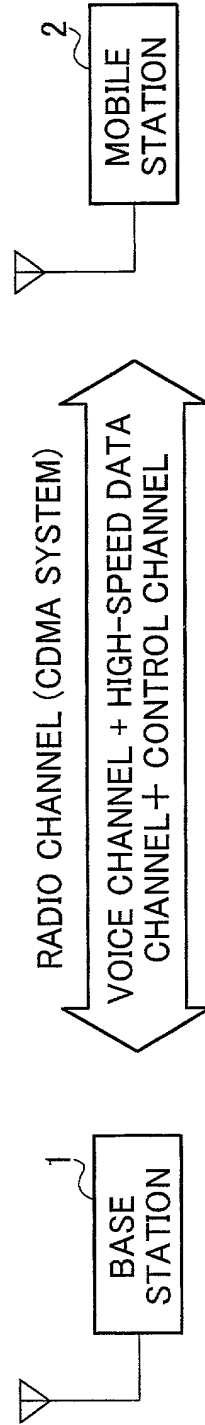


FIG. 1

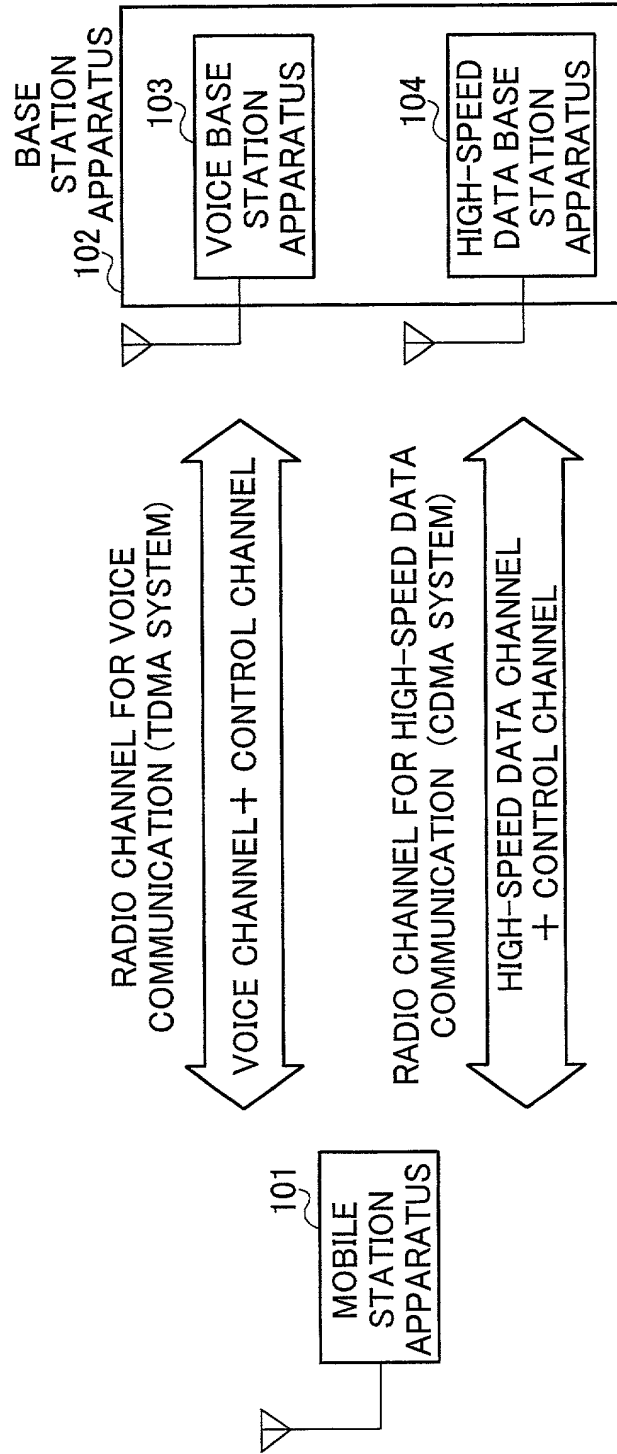


FIG.2

3/17

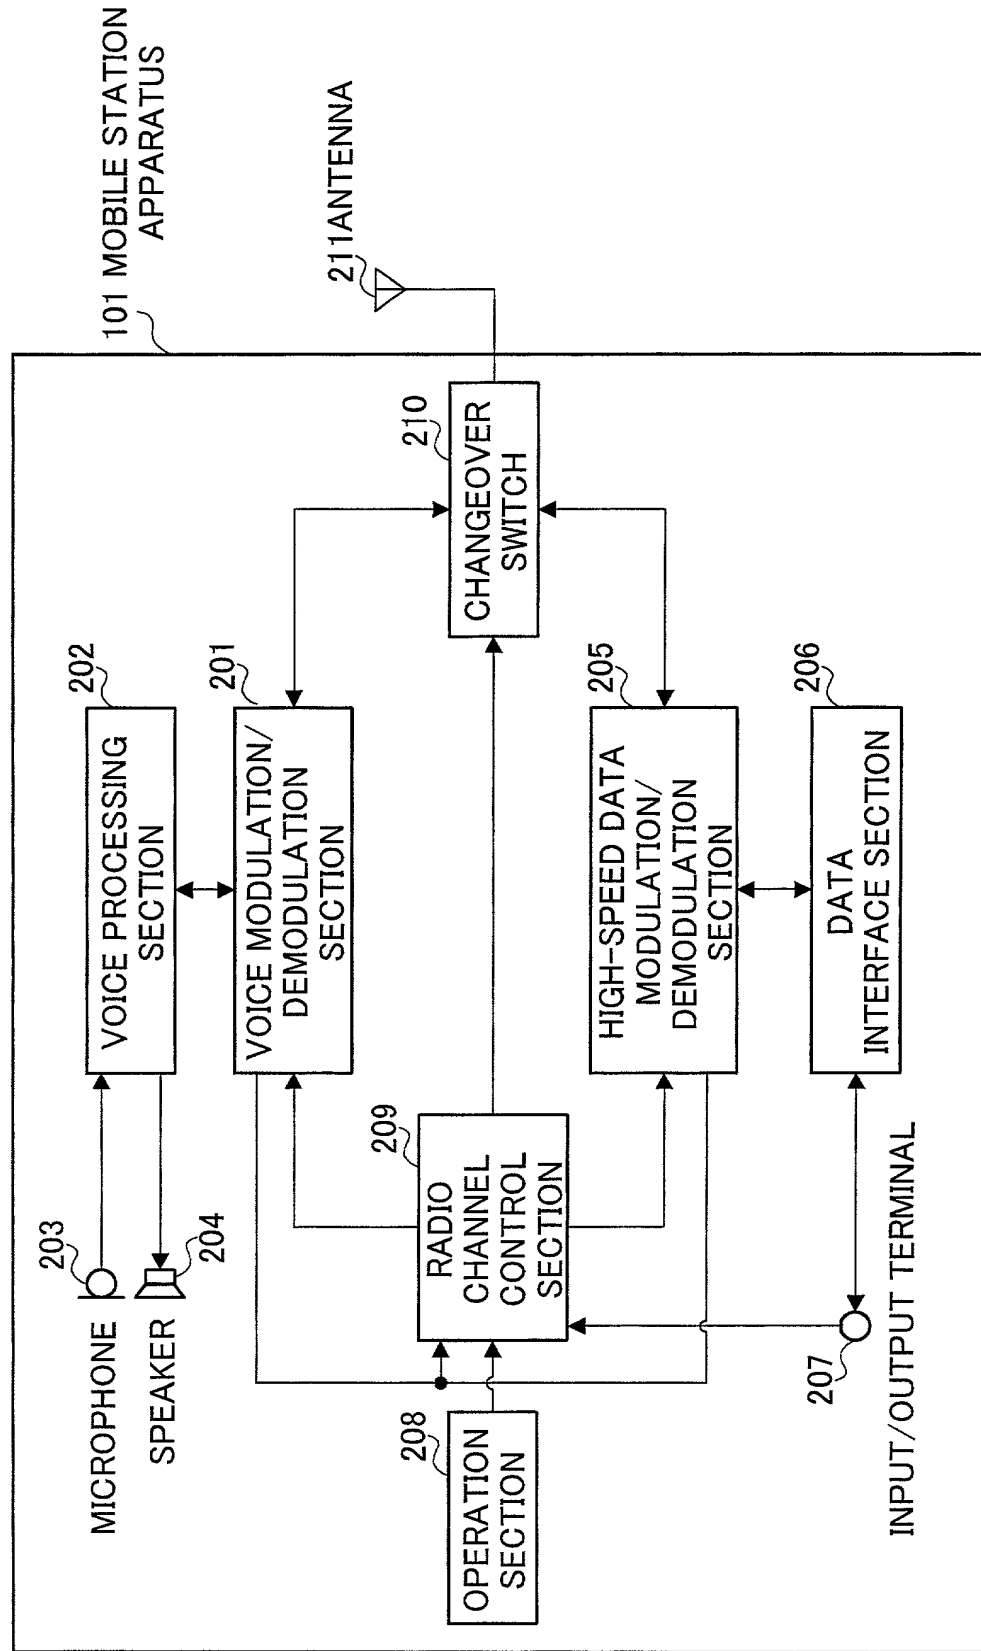


FIG.3

4/17

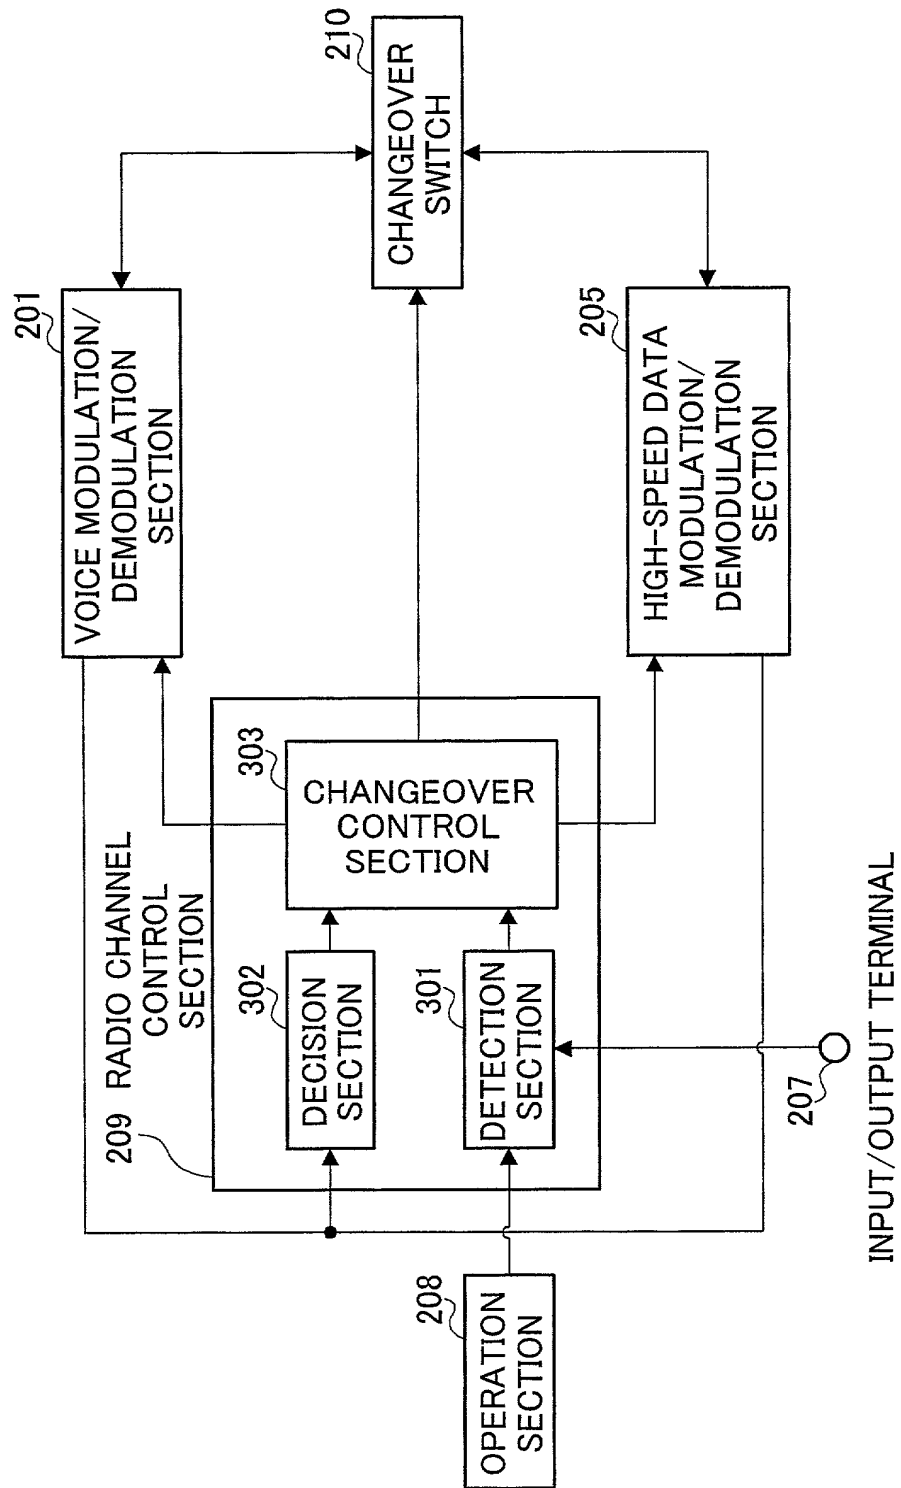


FIG. 4

5/17

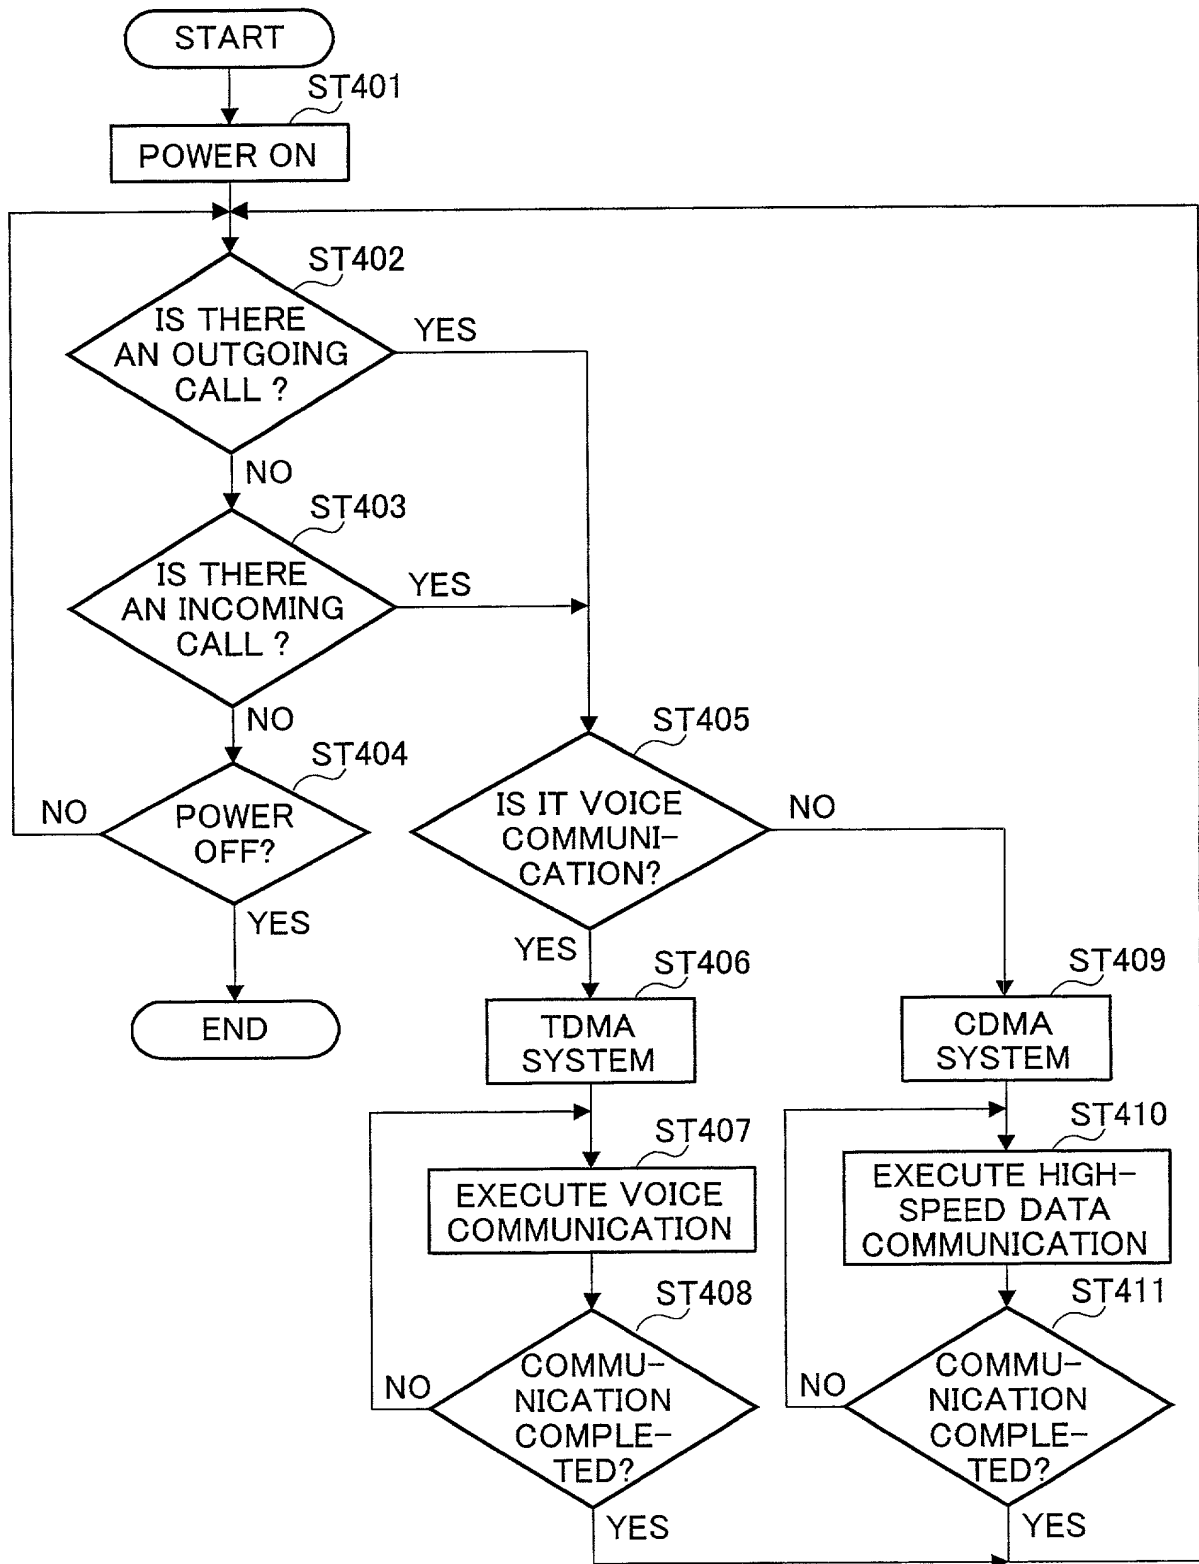


FIG.5

RADIO CHANNEL FOR  
COMMON CONTROL CHANNEL

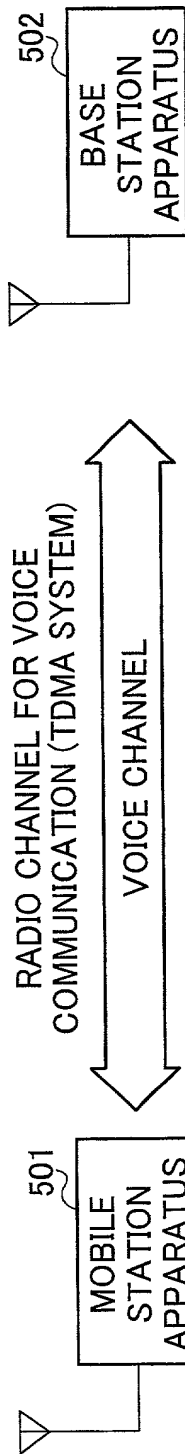


FIG.6

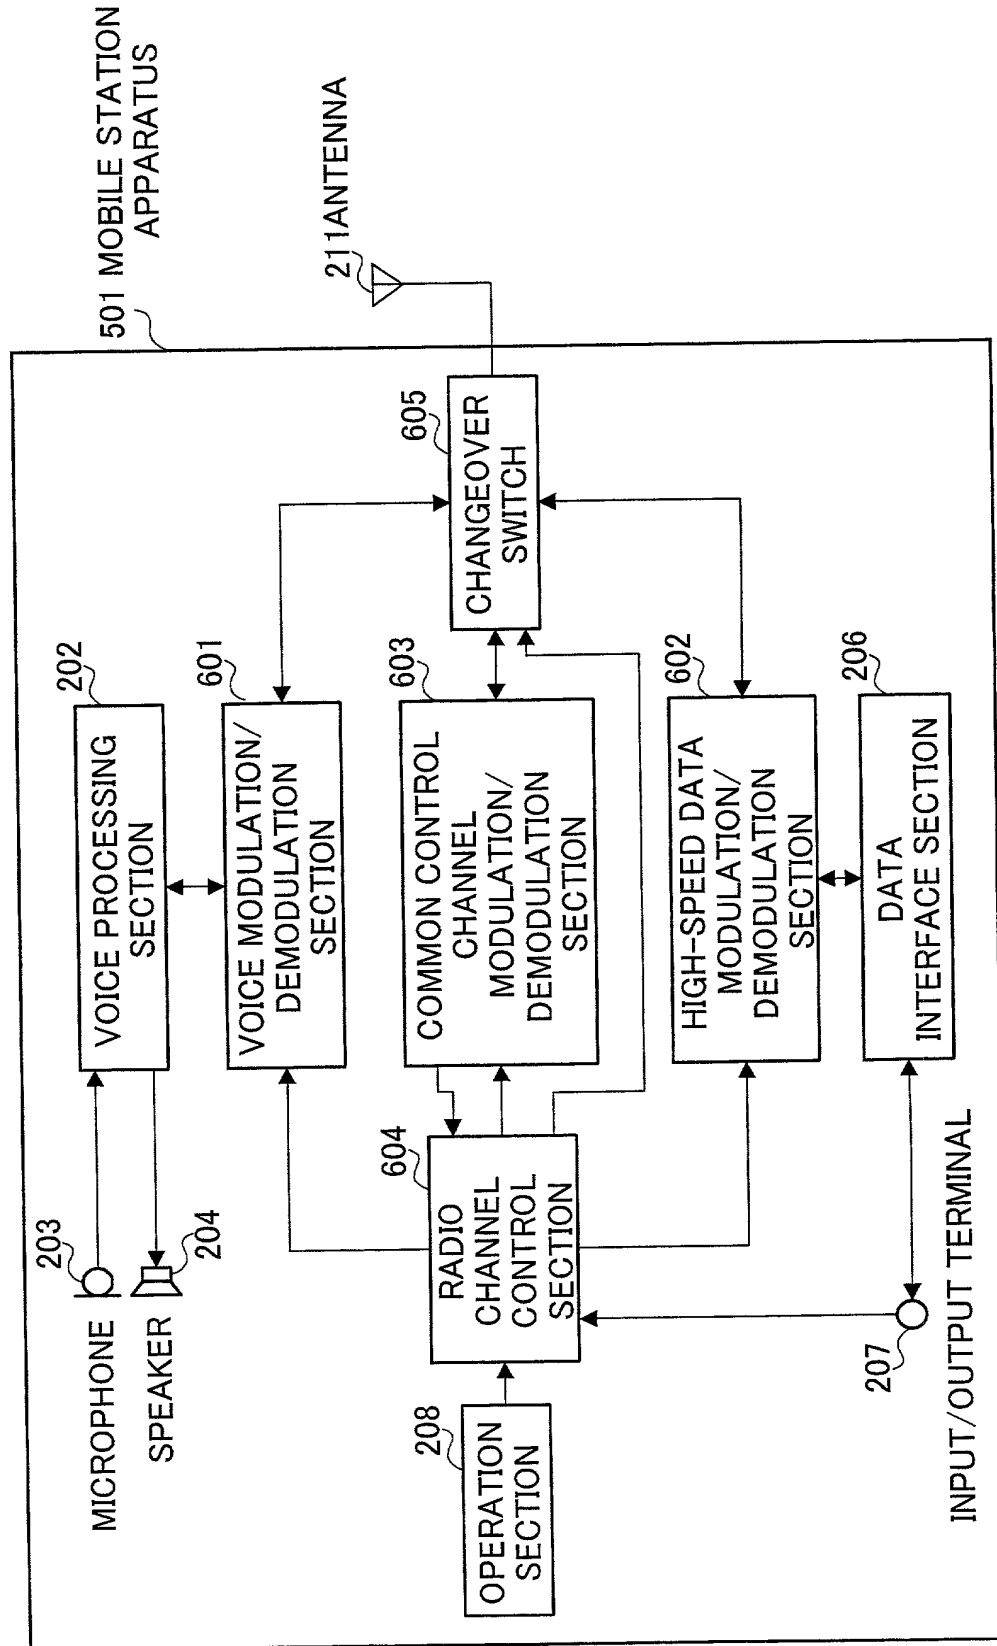


FIG.7

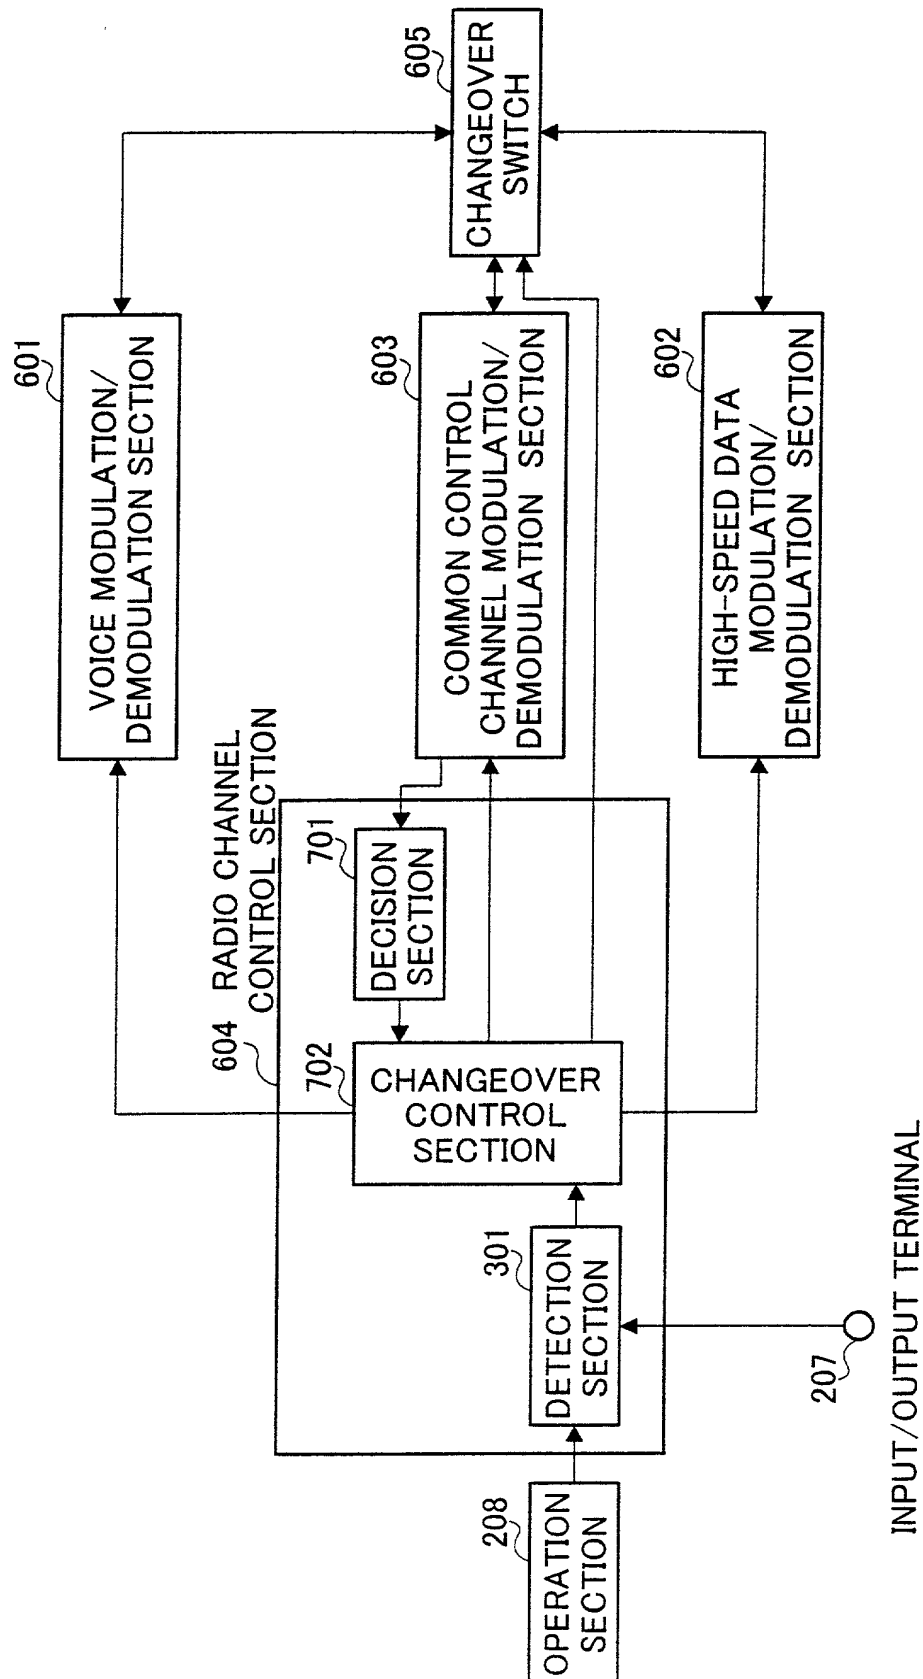


FIG. 8



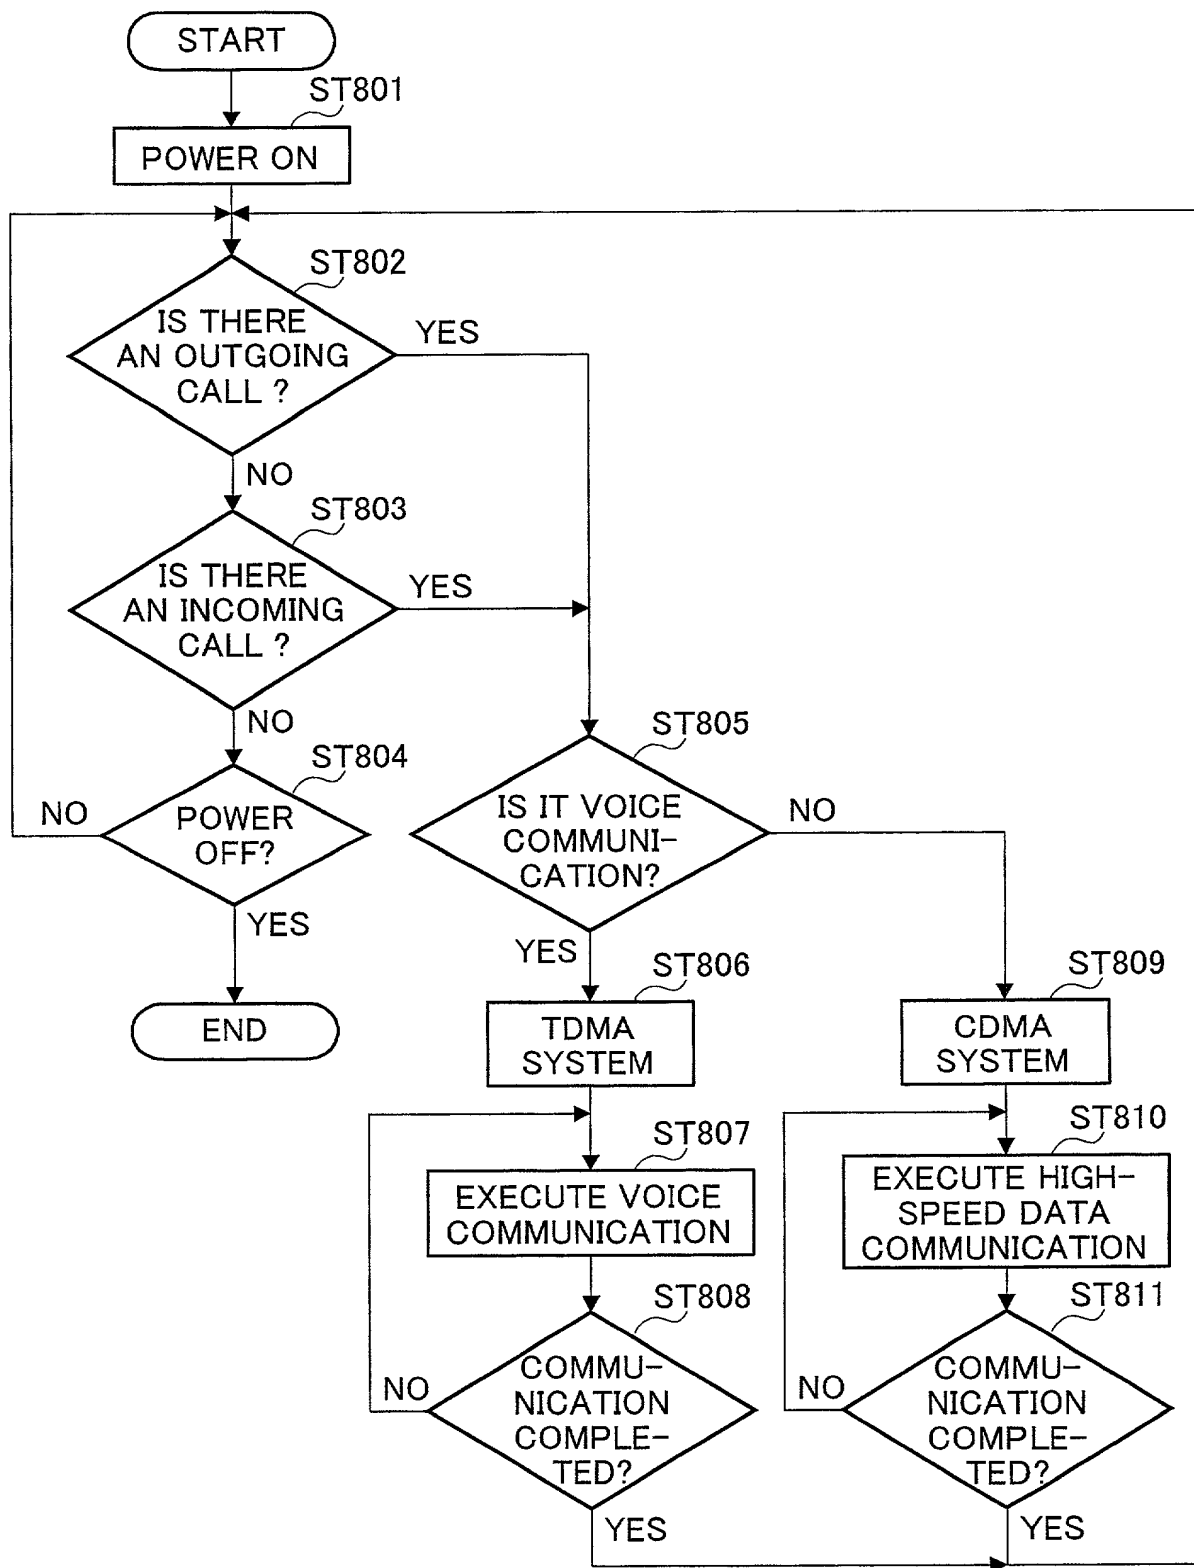


FIG.9

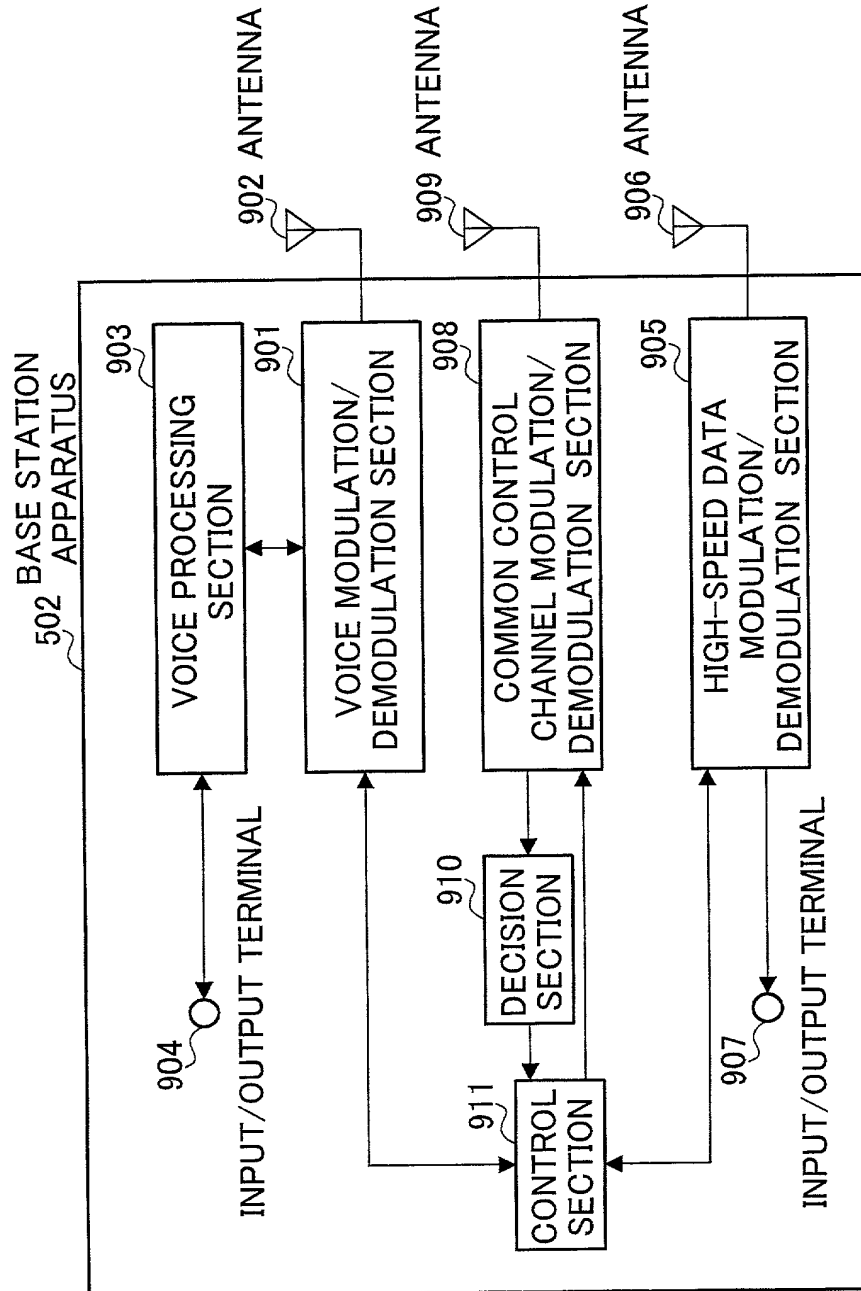


FIG.10

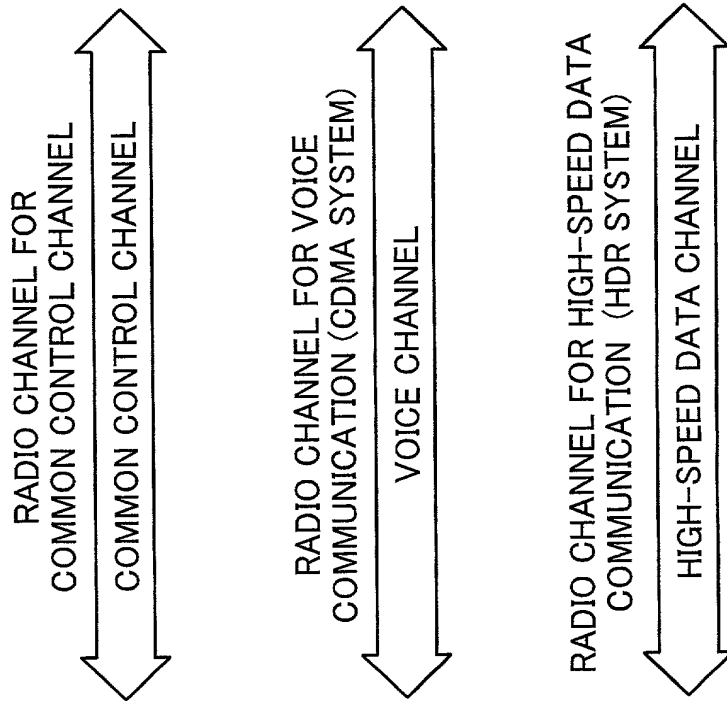


FIG.11

12/17

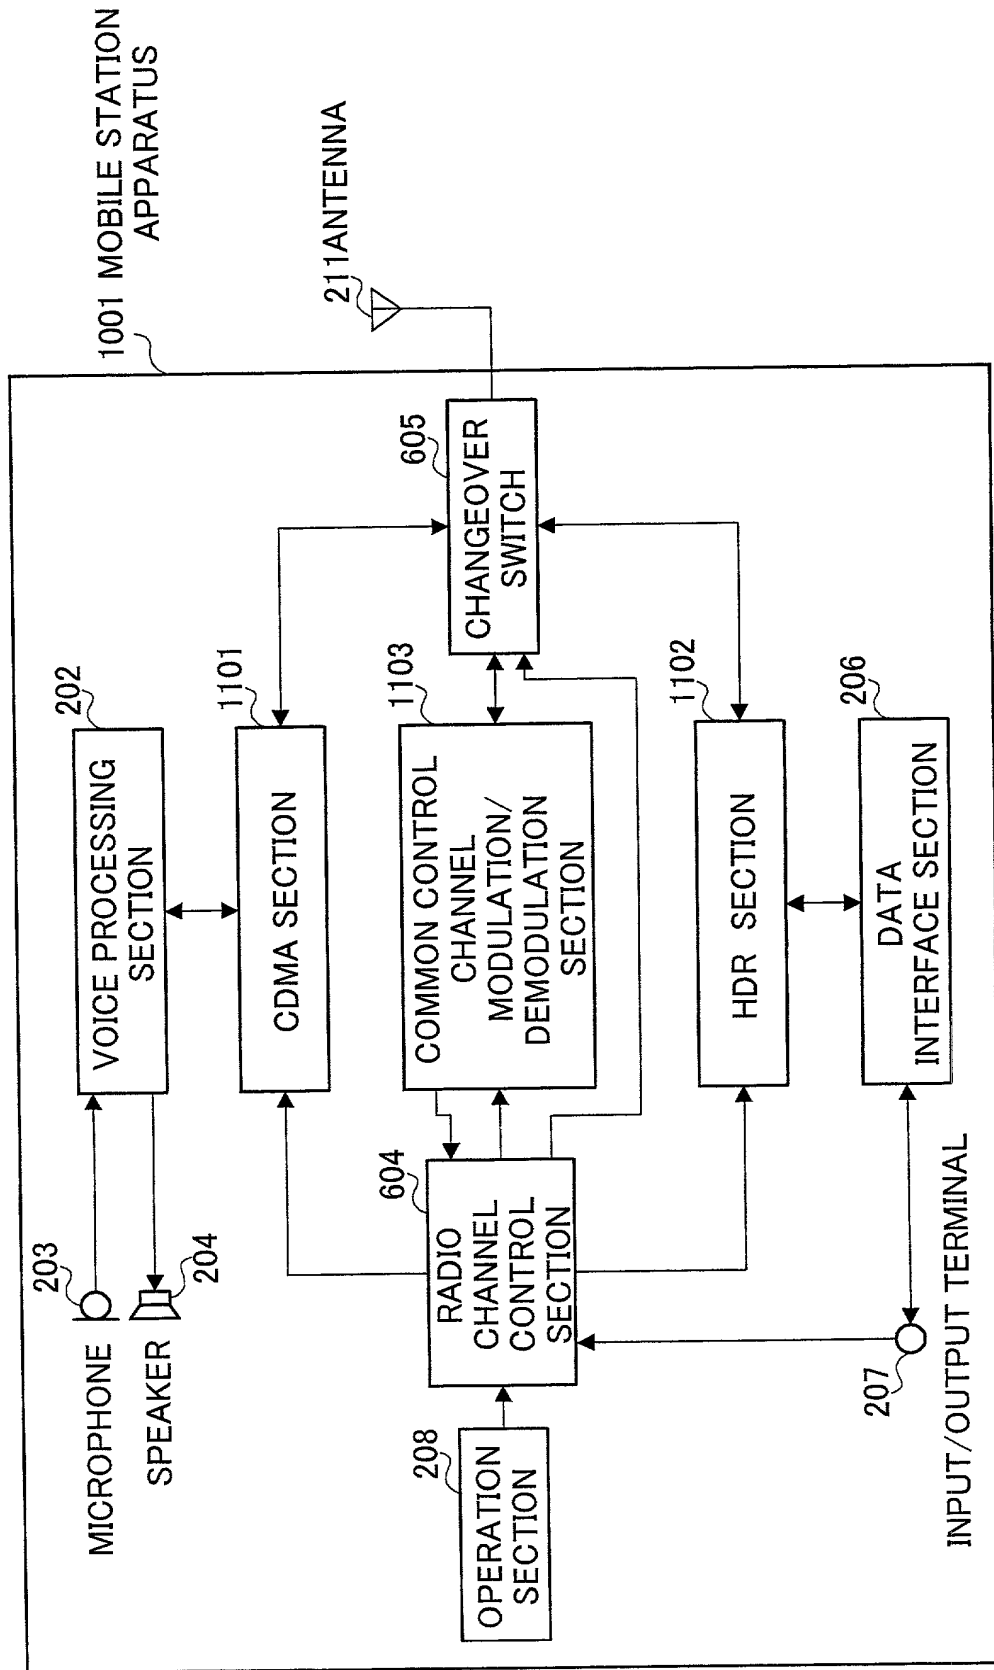


FIG. 12

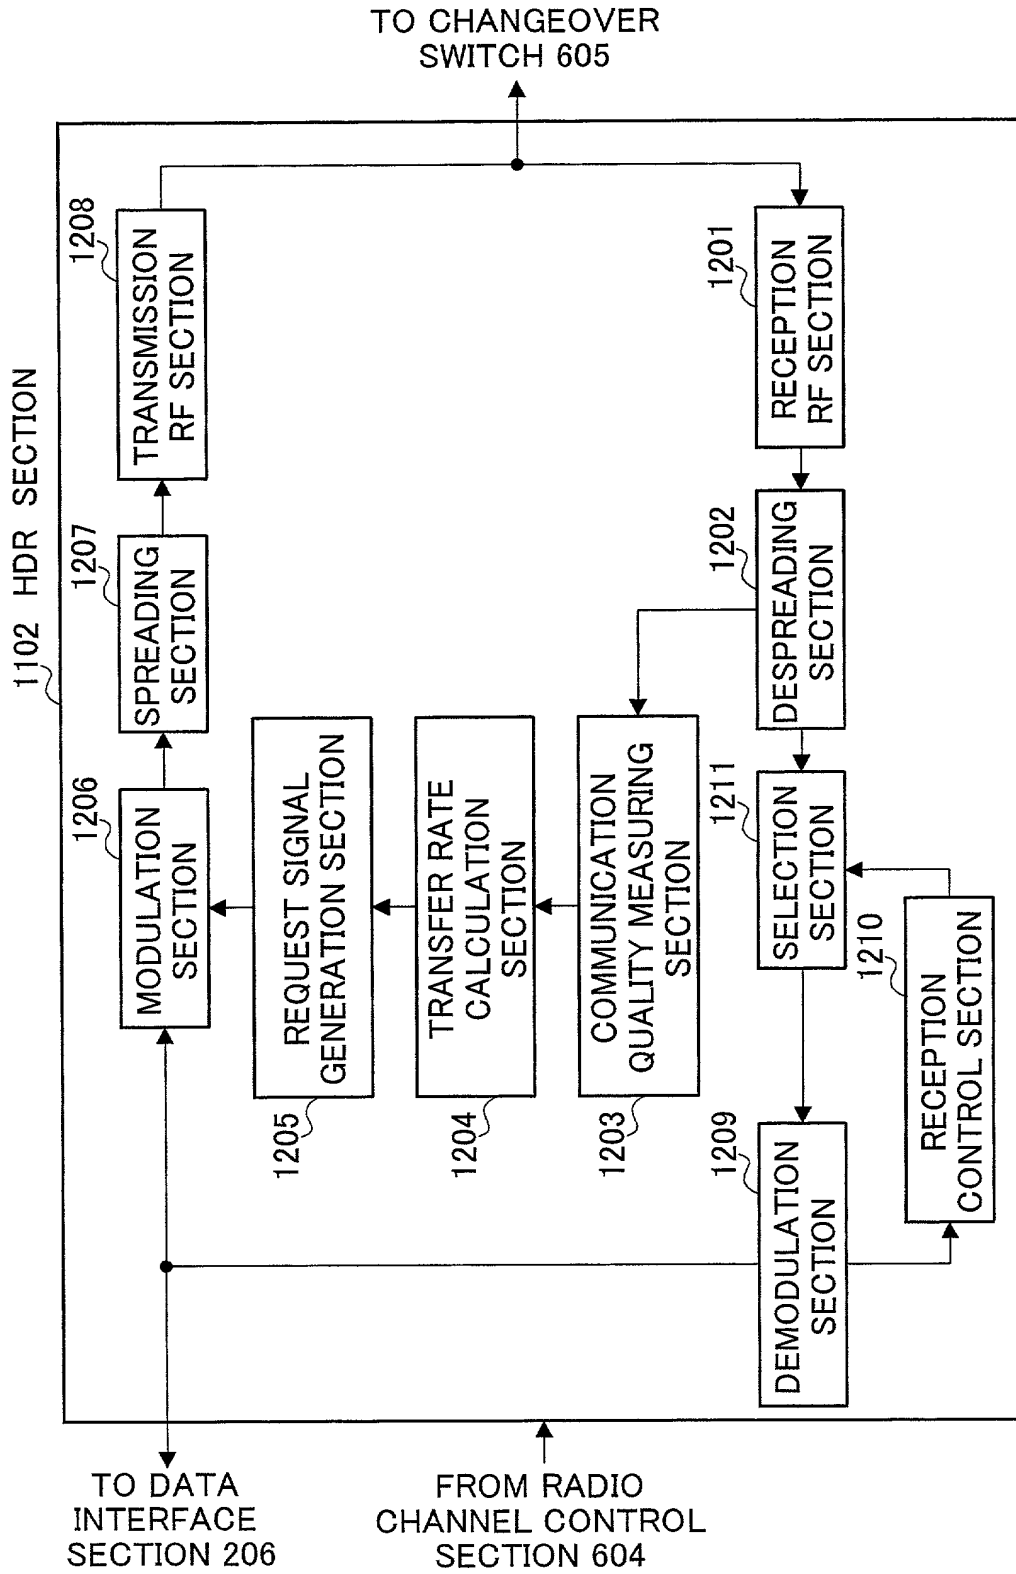


FIG.13

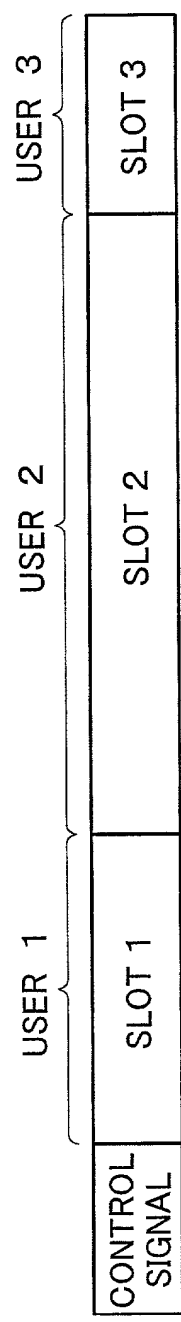


FIG.14

15/17

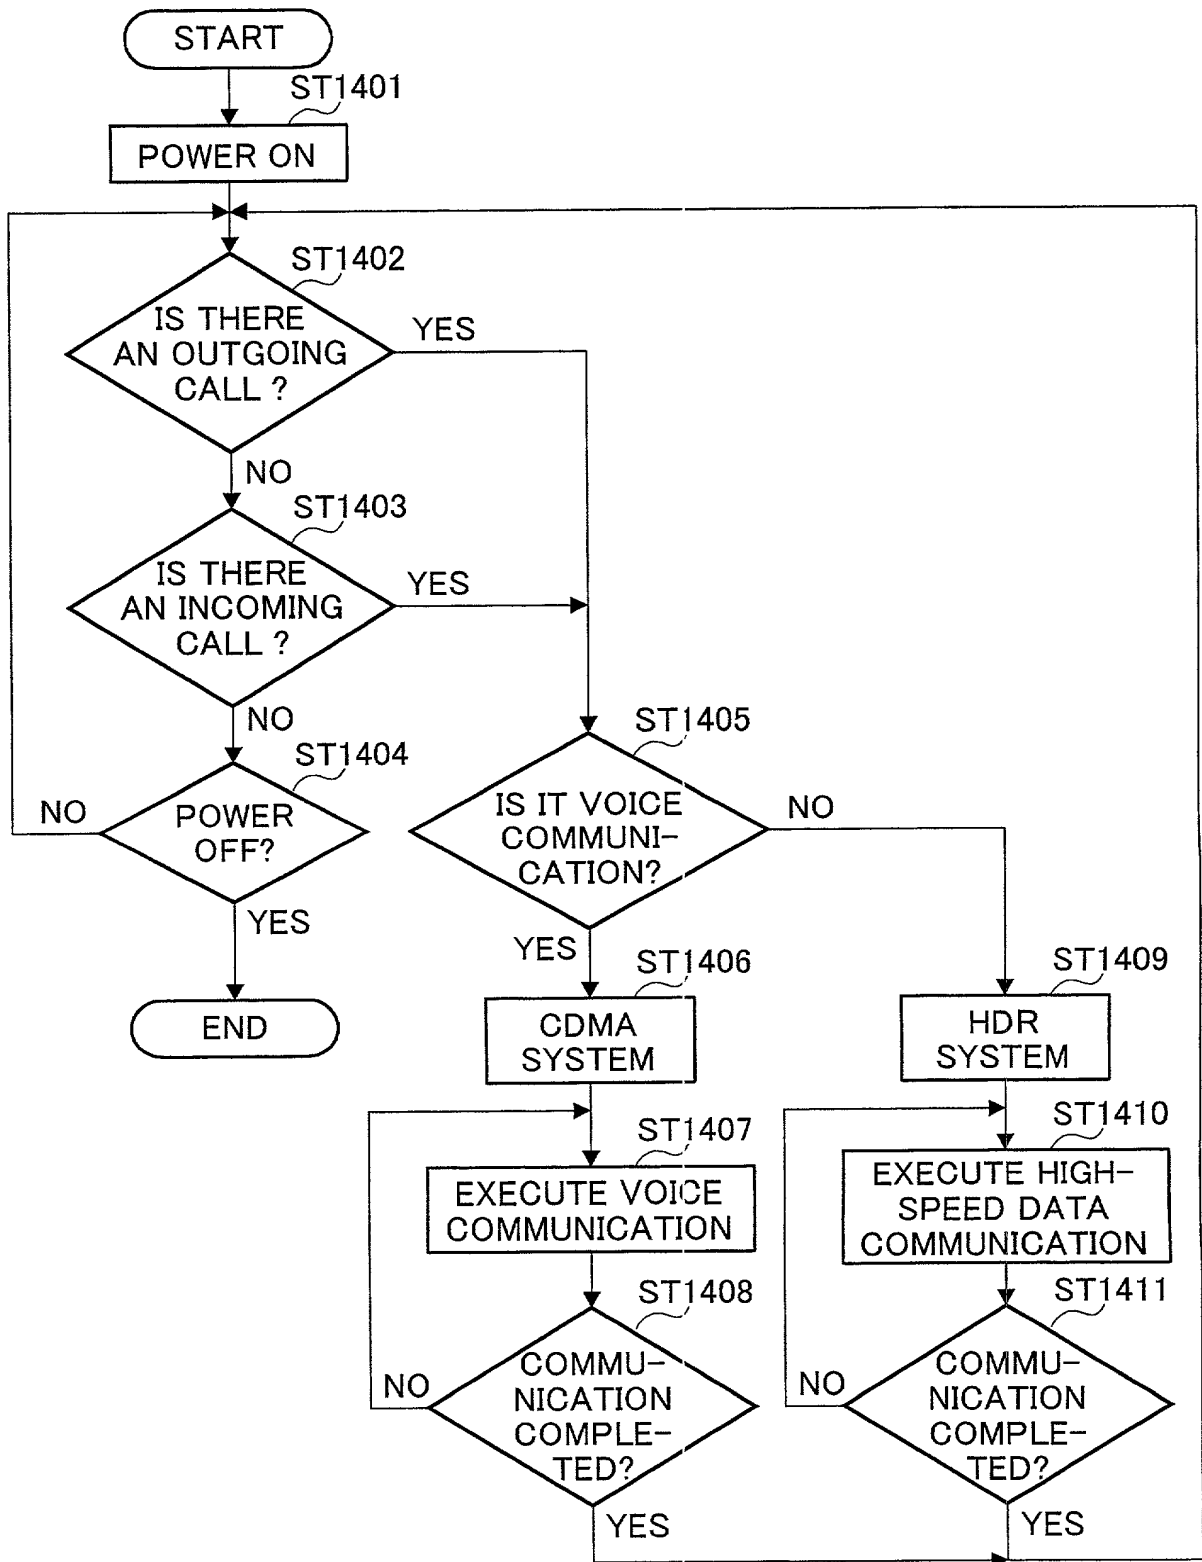


FIG. 15

16/17

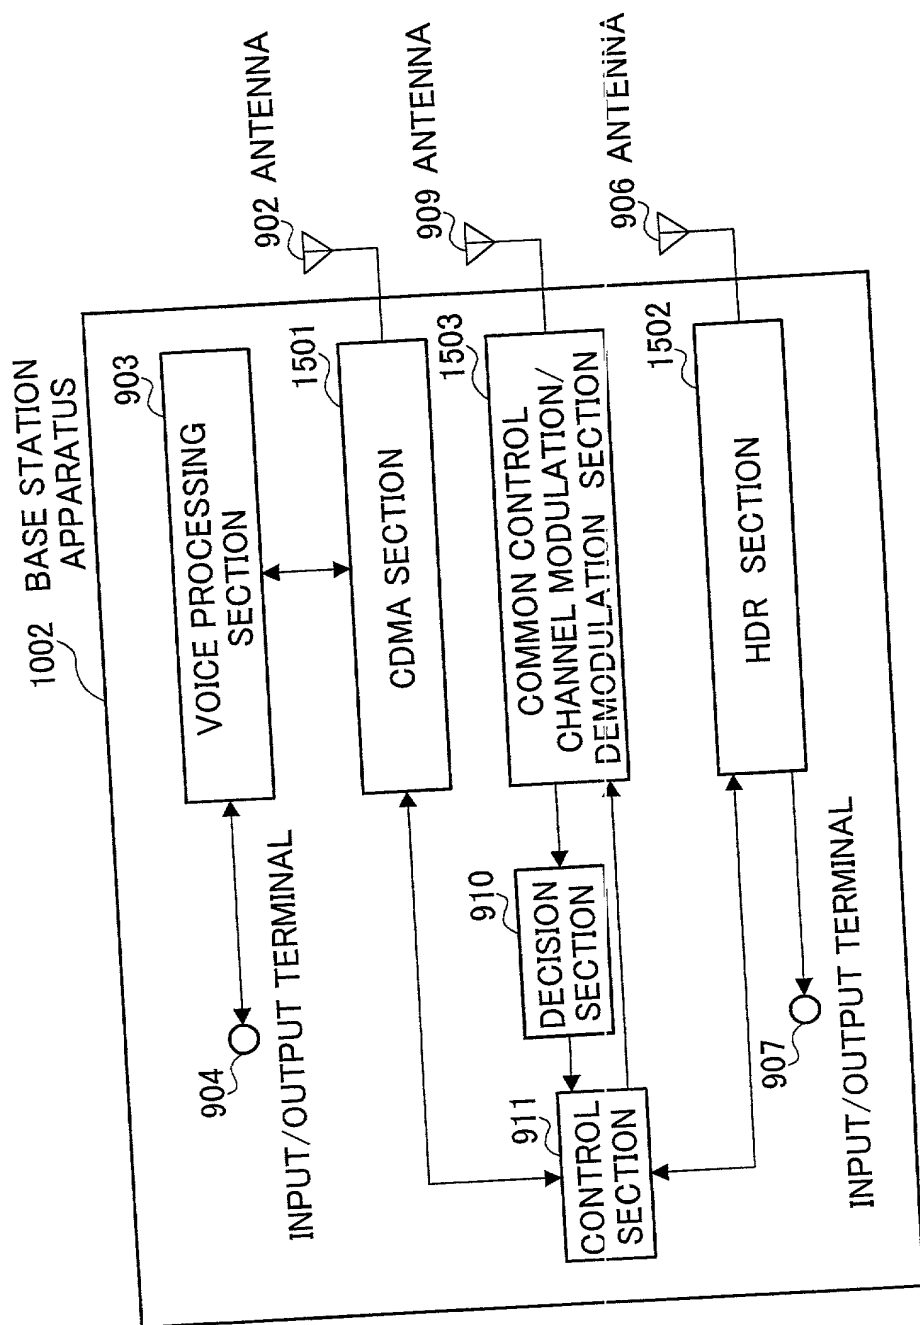


FIG. 16



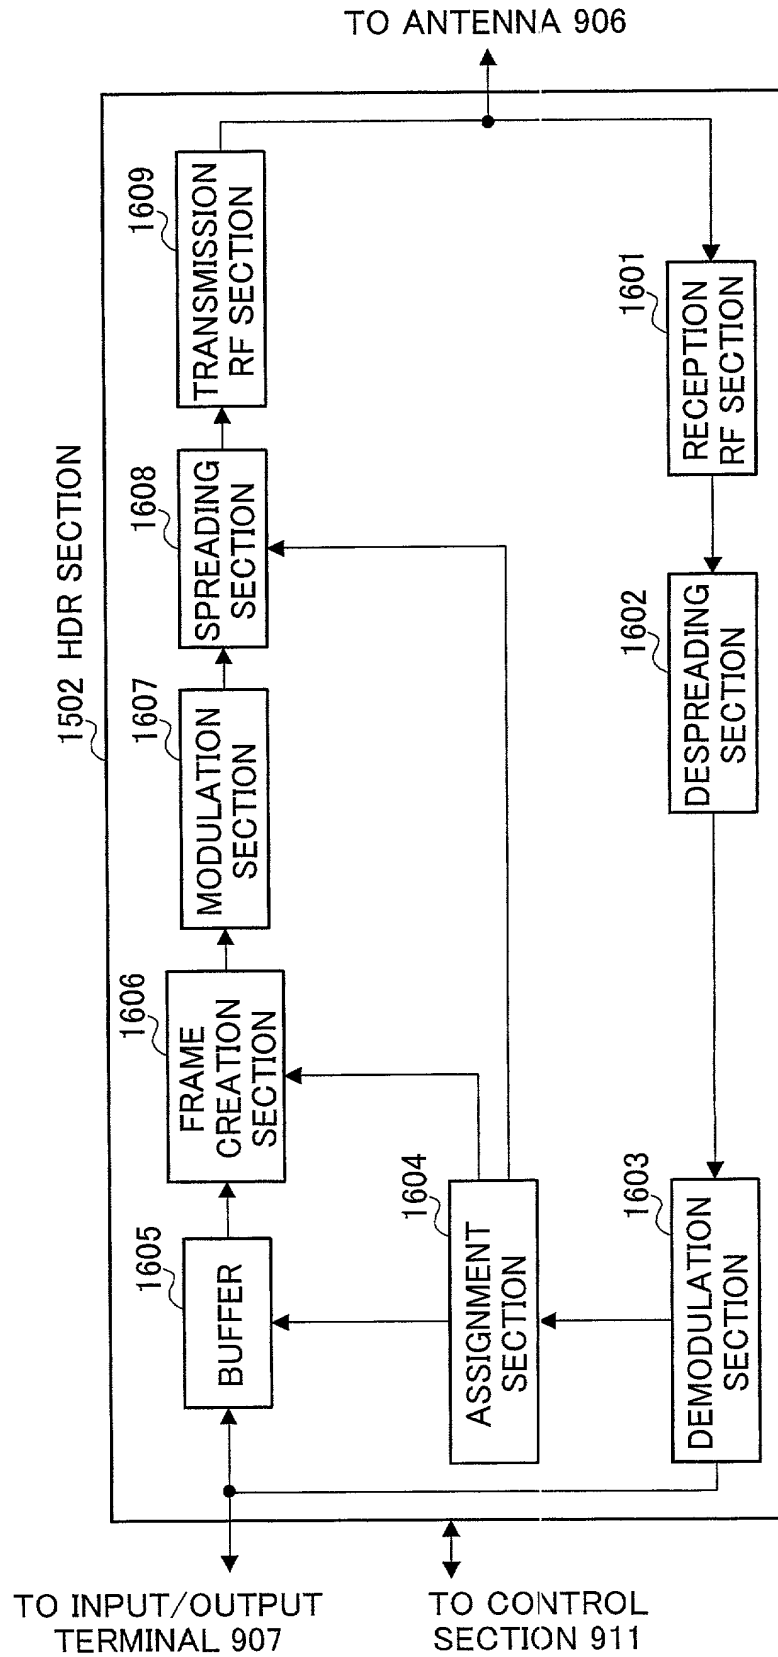


FIG.17

**APPLICATION FOR UNITED STATES PATENT**  
**Declaration for Patent Application**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on

the invention entitled: COMMUNICATION TERMINAL APPARATUS AND BASE STATION APPARATUS

the specification of which 2 (file no \_\_\_\_\_ )

(check at least one) 3 ☒ is attached hereto

4 ☐ was filed on \_\_\_\_\_ as (5) U.S. Application Serial No. \_\_\_\_\_

6 ☐ and was amended \_\_\_\_\_  
(if applicable)

Use this portion only if you are entering the U.S. National phase based on a PCT International Application designating the U.S.	7 <input checked="" type="checkbox"/>	was filed as PCT international application	
	8	Number <u>PCT/JP00/01911</u>	
	9	on <u>March 28, 2000</u>	
		and was amended under PCT Article(s) 19 and/or 34	
	10	on _____ (if applicable).	
	11	priority date claimed in PCT International Application	
	<u>JAPAN</u> (Country)	<u>JP11-096963</u> (Number)	<u>2/April/1999</u> (Day/Month/Year Filed)
	<u>JAPAN</u> (Country)	<u>JP2000-72819</u> (Number)	<u>15/March/2000</u> (Day/Month/Year Filed)
	_____ (Country)	_____ (Number)	_____ (Day/Month/Year Filed)

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended, by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me which is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date earlier than that of the application(s) on which priority is claimed.

Prior (Foreign) Application(s) any Priority Claims Under 35 U.S.C. 119			Priority Claimed	
12a	_____ (Country)	_____ (Number)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
	_____ (Country)	_____ (Number)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

Priority Claim(s) from U.S. Provisional Application(s) – I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

12b	Application No.	Day/Month/Year Filed	Application No.	Day/Month/Year Filed
-----	-----------------	----------------------	-----------------	----------------------

Do not use this portion to identify a PCT application if the parent application is the U.S. National phase of the PCT application	I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between filing date of the prior application and the national or PCT international filing date of this application.		
	13	_____ (U.S. Application Number)	_____ (U.S. Filing Date)

I hereby appoint the following attorneys of the firm of Stevens, Davis, Miller & Mosher, L.L.P. as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office:

James E. Ledbetter, Reg. No. 28732; Thomas P. Pavelko, Reg. No. 31689; and Anthony P. Venturino, Reg. No. 31674.

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO**  
**STEVENS, DAVIS, MILLER & MOSHER, L.L.P., 1645 L Street, N.W., Suite 850, Washington, D.C. 20036,**  
**TELEPHONE (202) 408-5100, FACSIMILE (202) 408-5200.**

See page 2 for signature lines

**STEVENS, DAVIS, MILLER & MOSHER, L.L.P.**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

**PAGE 2 OF U.S.A. DECLARATION FORM**

14a	Typewritten Full Name of Sole or First Inventor	<u>Yoshiyuki</u>	<u>OKUBO</u>
		Given Name	Family Name
15a	Inventor's Signature	<u>Yoshiyuki Okubo</u>	
16a	Date of Signature	<u>November</u>	<u>21</u> , <u>2000</u>
		Month	Day Year
17a	Residence	<u>Yokohama-shi</u>	<u>Kanagawa</u> <u>JAPAN</u>
		City	State or Province Country
18a	Citizenship	<u>JAPAN</u>	
19a	Post Office Address (Insert complete mailing address, including country)	<u>1-20-24, Nakazato, Minami-ku,</u> <u>Yokohama-shi, Kanagawa 232-0063 JAPAN</u>	
14b	Typewritten Full Name of Sole or First Inventor	<u>Izumi</u>	<u>HORIKAWA</u>
		Given Name	Family Name
15b	Inventor's Signature	<u>Izumi Horikawa</u>	
16b	Date of Signature	<u>November</u>	<u>21</u> , <u>2000</u>
		Month	Day Year
17b	Residence	<u>Yokohama-shi</u>	<u>Kanagawa</u> <u>JAPAN</u>
		City	State or Province Country
18b	Citizenship	<u>JAPAN</u>	
19b	Post Office Address (Insert complete mailing address, including country)	<u>2-14-5, Nishishiba, Kanazawa-ku,</u> <u>Yokohama-shi, Kanagawa 236-0017 JAPAN</u>	
14c	Typewritten Full Name of Sole or First Inventor	Given Name	Middle Name Family Name
15c	Inventor's Signature		
16c	Date of Signature	Month	Day Year
17c	Residence	City	State or Province Country
18c	Citizenship		
19c	Post Office Address (Insert complete mailing address, including country)		
14d	Typewritten Full Name of Sole or First Inventor	Given Name	Middle Name Family Name
15d	Inventor's Signature		
16d	Date of Signature	Month	Day Year
17d	Residence	City	State or Province Country
18d	Citizenship		
19d	Post Office Address (Insert complete mailing address, including country)		

\*Note to Inventor: Please sign name on line 15 exactly as it appears in line 14 and insert the actual date of signing on line 16. If there are more than four inventors, please add a copy of this page for identification and signatures for the additional inventors.